

Playground



Textile for jumping pillows



Highly UV resistant



Compliant to EN 71-3



Improved formula

B6501

Advantages

Vorteile // Avantages // Ventajas // Voordelen



Highly UV resistant

Extrem UV-beständig
Extrêmement résistant aux UV
Muy resistente a los UV
Extreem UV-bestendig



Improved formula

Verbesserde Rezeptur
Formule améliorée
Fórmula mejorada
Verbeterde formule





Compliant to EN 71-3

Konform mit EN 71-3
Conforme à EN 71-3
Cumple con EN 71-3
Conform EN 71-3



B6501

Highly UV resistant // Hochgradig UV-beständig // Hautement résistant aux UV // Altamente resistente a los UV // Heel UV-bestendig

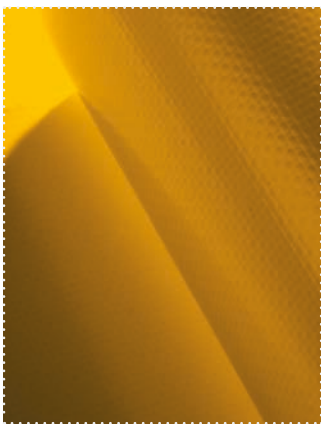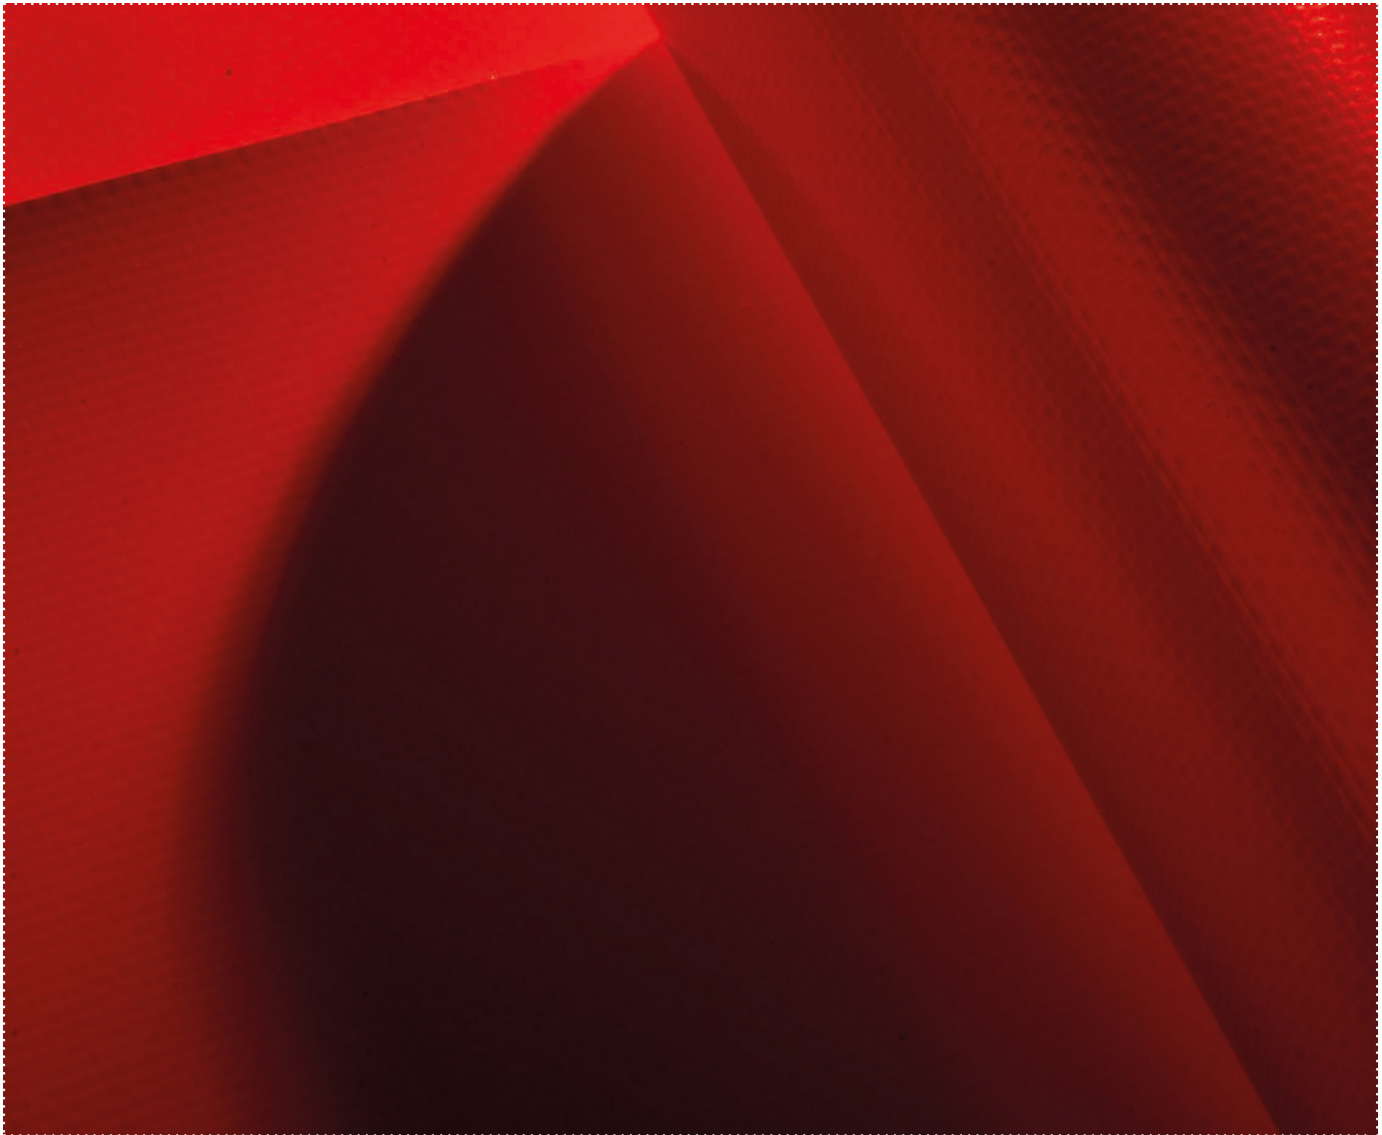

1001

←→ 300 cm



3002

On request // Auf Anfrage // Sur demande // Bajo pedido // Op verzoek



5020

←→ 300 cm



6037

←→ 300 cm

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande // Otros colores bajo pedido // Andere kleuren op aanvraag

Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

B6501

Highly UV resistant

Total Weight - ISO 2286/2:2016

Gesamtgewicht // Poids total // Peso total // Totaal gewicht

900 g/m²

Composition

Zusammensetzung // Composition // Composición // Samenstelling

PES + PVC

Fabric (Warp / Weft) - DIN ISO 2060:1994

Gewebe // Tissu // Tejido // Weefsel

PES, 1100 dtex
PES, 1100 dtex

Lacquering

Lackierung // Laquage // Tipo lacado // Lacquering

Top: glossy
Bottom: glossy

Breaking Strength (Warp / Weft) - ISO 1421/1:2016

Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte

4000 N/5cm
3850 N/5cm

Tear Strength (Warp / Weft) - DIN 53363:2003

Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand

600 N
500 N

Adhesion - ISO 2411:2017

Haftung // Adhérence // Adhesión // Hechting

100 N/5cm

Temperature resistance - EN 1876/1:1998

Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid

-40/+70 °C

Light Fastness - ISO 105 B02:2014

Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheid

7-8

Fire Behaviour - ISO 3795:1989

Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag

< 100 mm/min



Registration,
Evaluation,
Authorization
and restriction
of Chemicals



Recyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



Sustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar