

Advertising



SIOEN

Performance range for
outdoor advertising



Digital printing
fabric



Extremely
ink-receptive
top lacquers



All climate
appropriate

P7259 // P5600 // M5550

Advantages

Vorteile // Avantages // Ventajas // Voordelen



Digital printing fabric

Digitaldruckgewebe
Toile imprimerie digitale
Tejido de impresión digital
Doek digitale bedrukking



All climate appropriate

Geeignet für alle Klimatypen
Approprié à tous climats
Apropiado para todos los climas
Geschikt voor alle klimaten



Extremely ink-receptive top lacquers

Extrem tintenaufnehmende Decklackschicht
Couche supérieure de vernis réceptif à l'encre
Lacas superiores muy receptivas a la tinta
Extreem inktabsorberende toplaklagen

P7259

Frontlit semi dull/glossy // Frontlit semi-matt/hochglanz // Frontlit semi-mat/brillant // Frontlit semimate/brillante // Frontlit halfmat/glanzend



9917

←→ 320 cm

P5600

Block out // Super undurchsichtig // Super opaque //
Super opaco // Super opaak




9917

←→ 320 cm

M5550

Print mesh (M1) // Digital bedruckbares Gittergewebe
(M1) // Maille imprimable (M1) // Malla imprimible (M1) //
Bedruckbare mesh (M1)

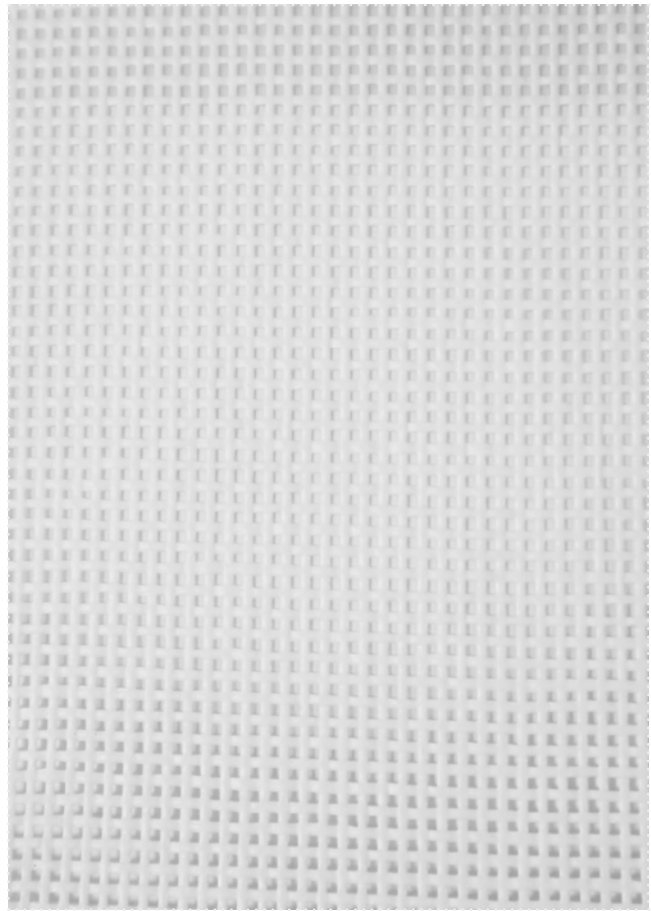

9917

←→ 320 cm





Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	P7259 Frontlit semi dull/glossy	P5600 Block out	M5550 Print mesh (M1)
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	600 g/m²	650 g/m²	250 g/m²
Composition Zusammensetzung // Composition // Composición // Samenstelling		PES + PVC	
Fabric (Warp / Weft) DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel	PES, 1100 dtex PES, 1100 dtex	PES, 550 dtex PES, 550 dtex	PES, 1100 dtex PES, 1100 dtex
Lacquering Lackierung // Laquage // Tipo lacado // Lacquering	Top: semi dull Bottom: glossy	Top: semi dull Bottom: glossy	-
Breaking Strength (Warp / Weft) - ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	2500 N/5cm 1800 N/5cm	2100 N/5cm 1500 N/5cm	≥ 1825 N/5cm ≥ 1825 N/5cm
Tear Strength (Warp / Weft) - DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	250 N 250 N	100 N 100 N	-
Adhesion - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting	80 N/5cm	60 N/5cm	-
Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C	-40/+70 °C	-30/+70 °C
Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit	7-8	7-8	6 - 8
Fire Behaviour - ISO 3795:1989 Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	< 100 mm/min	< 100 mm/min	(NFP 92 507:2004) M1

Registration,
Evaluation,
Authorization
and restriction
of ChemicalsRecyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textielSlitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraagSustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar**SioLine**

your guide to coated fabrics

Go to [sioline.com](https://www.sioline.com) for more information.

Fabriekstraat 23 - 8850 Ardoos - Belgium

+32 (0) 51 740 900 - info@sioline.com - [sioline.com](https://www.sioline.com)

Produced in Belgium & France in ISO 9001:2015 certified plants



All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. All SioLine products comply with the Reach Regulation 1907/2006/CE. Last modified: 4 maart 2024 2:15 p.m..