

Boat



NEW & improved collection 2024



New super dull embossing



Waterproof



Lightweight



UV resistant



Anti-bacterial


5

years warranty

D2360 // D7460 // D9420 //
Allround mesh

Allround mesh // W50500690 - M5509

Multi-use + 80% wind reduction // Vielseitig einsetzbar + 80% Windreduzierung // Multi-usage + 80% de réduction du vent // Multiuso + 80% de reducción de viento // Veelzijdig + 80% windreductie

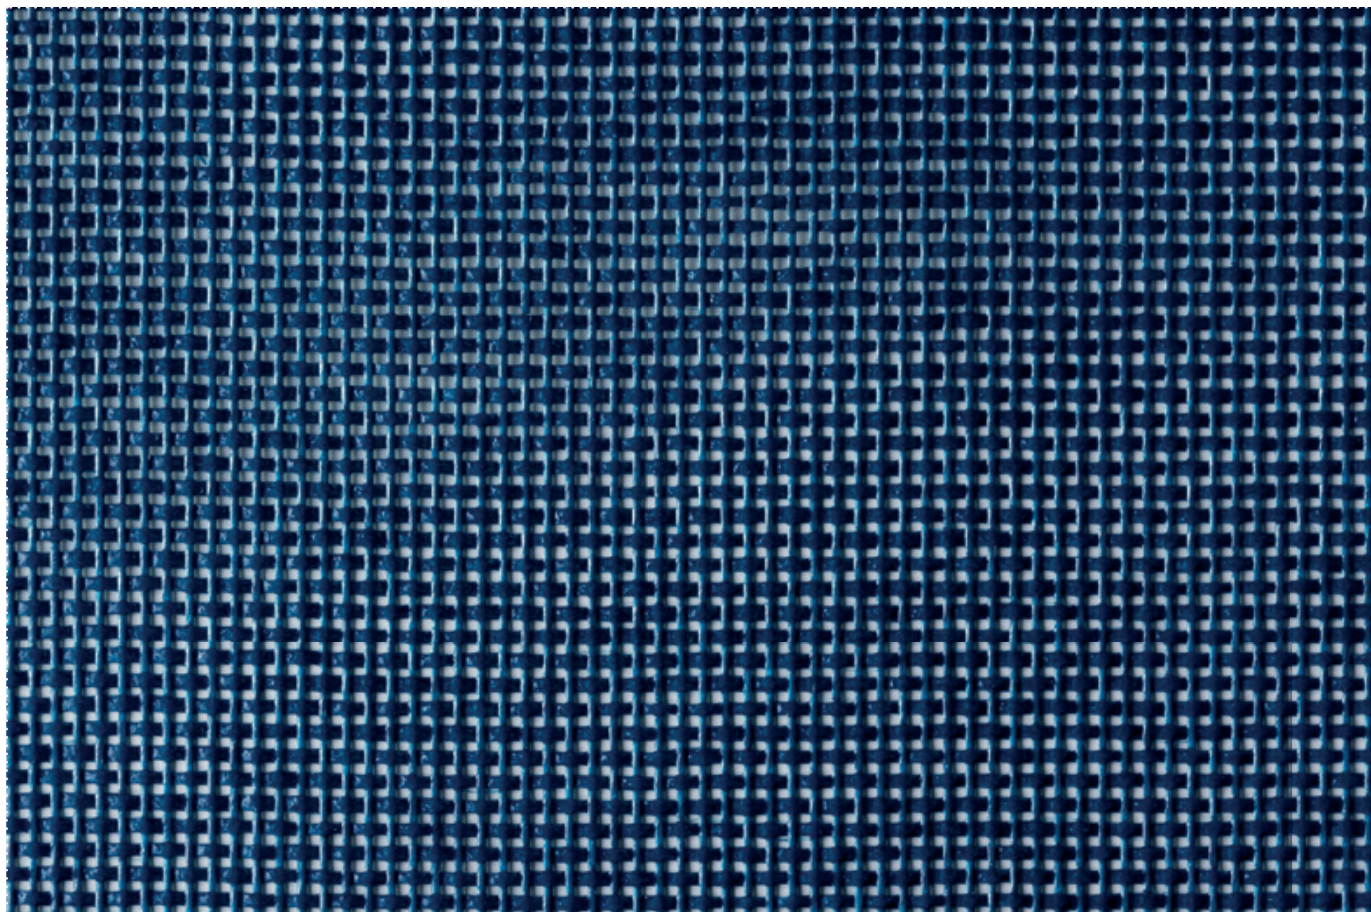

5452

←→ 210 cm ↕ 50m



8600

←→ 210 cm ↕ 50m



9917

←→ 210 cm ↕ 100m

D2360

Lightweight // Leichtgewicht // Léger // Ligero
Lichtgewicht



5335 **7002** **7185**
↔ 218 cm ↕ 50m ↔ 218 cm ↕ 50m ↔ 218 cm ↕ 50m



8600 **9002**
↔ 218 cm ↕ 50m ↔ 218 cm ↕ 50m

D7460

Highly robust // Äußerst robust // Grande robustesse //
Muy resistente // Uiterst robuust



5335 **7002** **9002**
↔ 218 cm ↕ 50m ↔ 218 cm ↕ 50m ↔ 218 cm ↕ 50m

D9420

Low wick




On request

Auf Anfrage // Sur demande
// Bajo pedido // Op verzoek


Clean & Care

Reinigung & Pflege // Nettoyage et entretien //
Limpieza y cuidado // Reiniging en onderhoud




Air periodically

Regelmäßig lüften // Aérer périodiquement //
Ventilar periódicamente // Regelmatig ventileren




Clean regularly using a soft cloth (using only water-based neutral cleaners)

Regelmäßig mit einem weichen Tuch reinigen (nur
neutrale Reinigungsmittel auf Wasserbasis verwenden)
// Nettoyer régulièrement à l'aide d'un chiffon doux (en
utilisant uniquement des nettoyeurs neutres à base d'eau)
// Limpiar regularmente con un paño suave (utilizando sólo
limpiadores neutros a base de agua) // Maak regelmatig
schoon met een zachte doek (gebruik alleen neutrale
reinigingsmiddelen op waterbasis)




Only store when fully dried

Nur vollständig getrocknet lagern // Ne stocker qu'après
séchage complet // Almacenar sólo seco // Alleen opbergen
als het volledig gedroogd is



Do not use high-pressure cleaners

Keine Hochdruckreiniger verwenden // Ne pas utiliser de
nettoyeurs à haute pression // No utilizar limpiadores de alta
presión // Geen hogedrukreinigers gebruiken



Don't stack multiple covers

Abdeckungen nicht stapeln // Ne pas empiler les
couvertures // No apilar cubiertas // Dekzeilen niet stapelen



Advantages

Vorteile // Avantages // Ventajas // Voordelen



New super dull embossing

Neue Super-Matt-Prägung
Nouveau gaufrage super mat
Nuevo gofrado super mate
Nieuwe supermatte kalender



UV resistant

UV-beständig
Résistant aus UV
Resistente a los UV
UV-bestendig



Waterproof

Wasserdicht
Imperméable à l'eau
Impermeable
Waterdicht



Anti-bacterial

Antibakteriell
Antibactérien
Antibacteriano
Antibacterieel



Lightweight

Leichtgewicht
Poids-léger
Ligero
Lichtgewicht



Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	D2360 Lightweight	D7460 Highly robust	D9420 Low wick	Allround mesh Multi-use + 80% wind reduction
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	360 g/m²	460 g/m²	420 g/m²	250 g/m²
Composition Zusammensetzung // Composition // Composición // Samenstelling	PES + PVC			
Coating Beschichtung // Enduction // Recubrimiento // Coating	2-sided	1-sided	1-sided	2-sided
Fabric (Warp / Weft) DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel	PES, 280 dtex PES, 280 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex
Lacquering Lackierung // Laquage // Tipo lacado // Lacquering	Top: glossy Bottom: glossy	Top: dull	Top: dull	-
Breaking Strength (Warp / Weft) ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	1300 N/5cm 1300 N/5cm	2500 N/5cm 1800 N/5cm	3000 N/5cm 2800 N/5cm	≥ 1600 N/5cm ≥ 1600 N/5cm
Tensile Strength Elongation (Warp / Weft) NBN EN ISO 1421_2017 Reissdehnung // Allongement sous charge determine // Resistencia a la traccion alargamiento de deformacion // Breukverlenging	-	-	-	≥ 18 % ≥ 18 %
Tear Strength (Warp / Weft) Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarró // Scheurweerstand	(DIN EN ISO 4674/1A:2017) 70 N 60 N	(DIN 53363:2003) 250 N 250 N	(DIN 53363:2003) 300 N 300 N	≥ 400 N ≥ 400 N
Adhesion - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting	60 N/5cm	80 N/5cm	80 N/5cm	-
Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C	-40/+70 °C	-40/+70 °C	-30/+70 °C
Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit	7-8	7-8	7-8	6-8
Fire Behaviour - ISO 3795:1989 Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	< 100 mm/min	< 100 mm/min	< 100 mm/min	-



Registration,
Evaluation,
Authorization
and restriction
of Chemicals



Recyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



Sustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar