

Camping



The worldwide market reference



Worldwide market reference



UV resistant



Anti-bacterial




Unique and complete range

C2349 // C2421 // C5525 //
C7456 // C7458 // Meshquito

C2349

Linen embossing + lightweight // Leinen-Prägung + leichtgewicht // Gaufrage en lin + léger // Acabado lino + ligero // Linnen-afwerking + lichtgewicht

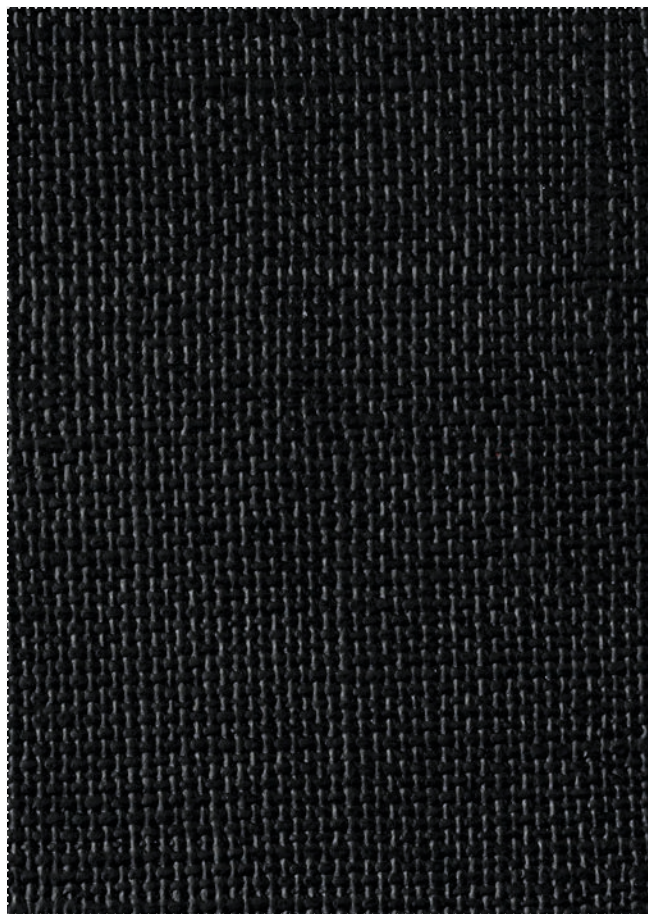


On request

Auf Anfrage // Sur demande // Bajo pedido // Op verzoek

Meshquito // W6565060V

Anti-insect // Anti-Insekten // Anti-insectes // Anti-insectos // Anti-insect

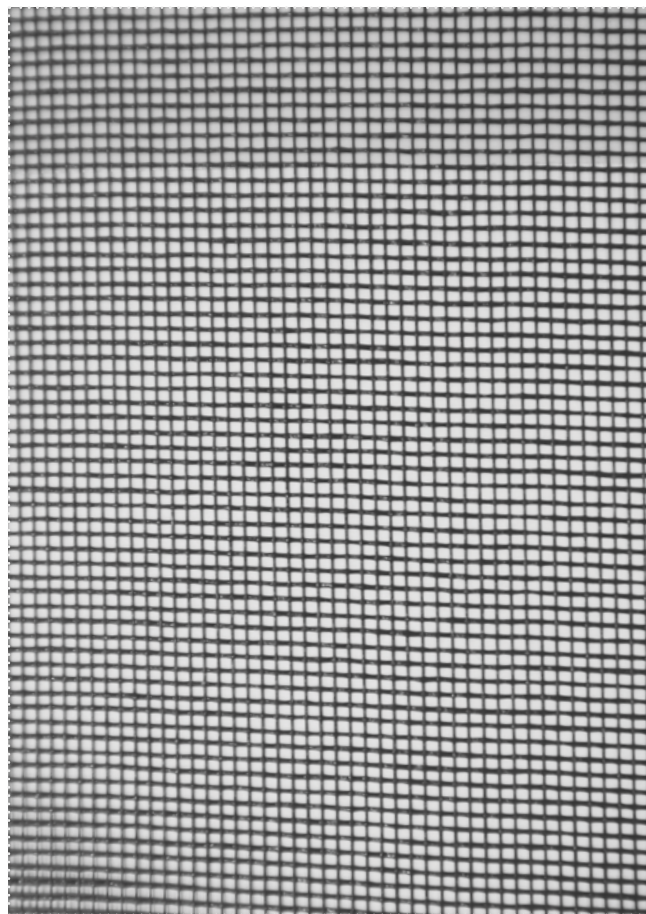

On request

Auf Anfrage // Sur demande // Bajo pedido // Op verzoek

←→ 150 cm



C7456

Linen embossing + highly robust // Leinen-Prägung + äußerst robust // Gaufrage en lin + grande robustesse // Acabado lino + muy resistente // Linnen-afwerking + uiterst robuust



1617

On request // Auf Anfrage
// Sur demande // Bajo
pedido // Op verzoek



5041

↔ 150 cm



7005

↔ 150 cm



7007

↔ 150 cm



7009

↔ 150 cm




7211 - RAL 7047

↔ 150 cm



7222

↔ 150 cm



7999

↔ 150 cm



9002

↔ 150 cm

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag

C7458

Highly robust // Äußerst robust // Grande robustesse // Muy resistente // Uiterst robuust



7005

↔ 150 cm



7006


↔ 150 cm



*Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag*

C2421

Opaque // Undurchsichtig // Opaque // Opaco // Opaak

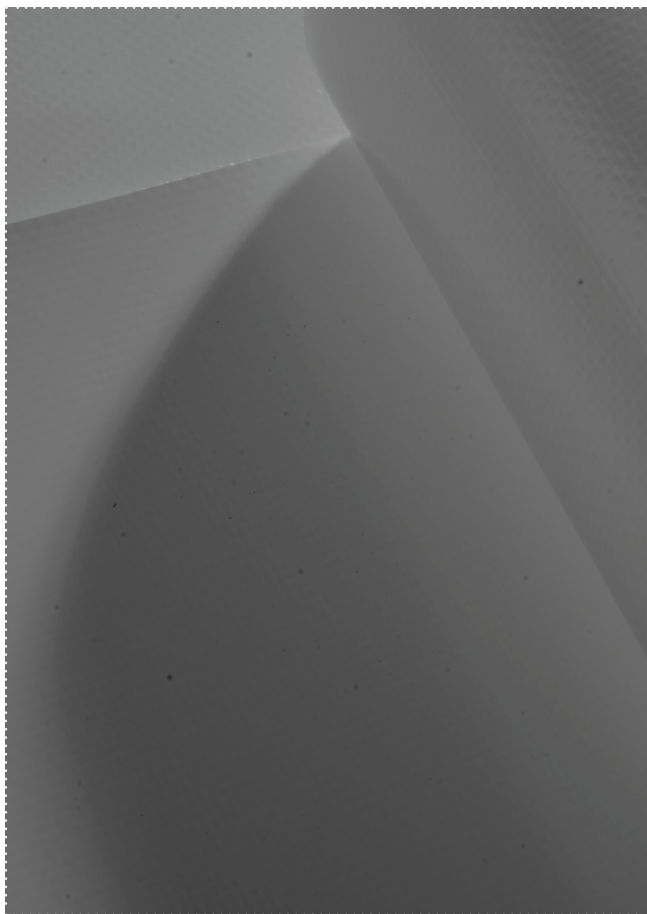

On request

Auf Anfrage // Sur demande // Bajo pedido // Op verzoek

C5525

Opaque + robust // Undurchsichtig + robust // Opaque + grande robustesse // Opaco + muy resistente // Opaak + robuust



7003

↔ 240 cm, 260 cm, 270 cm, 300 cm



Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag



Advantages

Vorteile // Avantages // Ventajas // Voordelen



Worldwide market reference

Weltweite Marktreferenz
Référence mondiale du marché
Referencia del mercado mundial
Wereldwijde marktreferentie



Anti-bacterial

Antibakteriell
Antibactérien
Antibacteriano
Antibacterieel



UV resistant

UV-beständig
Résistant aux UV
Resistente a los UV
UV-bestendig



Unique and complete range

Einzigartige und komplette
Kollektion
Gamme unique et complète
Gama única y extensa
Uniek en compleet aanbod





Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	C2349 Linen embossing + lightweight	Meshquito W6565060V Anti-insect	C7456 Linen embossing + highly robust	C7458 Highly robust	C2421 Opaque	C5525 Opaque + robust
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	350 g/m²	90 g/m²	450 g/m²	450 g/m²	420 g/m²	520 g/m²
Composition Zusammensetzung // Composition // Composición // Samenstelling	PES + PVC					
Fabric (Warp / Weft) DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel	PES, 280 dtex PES, 280 dtex	PES, 280 dtex PES, 280 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 280 dtex PES, 280 dtex	PES, 550 dtex PES, 550 dtex
Lacquering Lackierung // Laquage // Tipo lacado // Lacquering	Top: dull Bottom: dull	dull	Top: dull Bottom: dull	Top: dull Bottom: glossy	Top: dull Bottom: glossy	Top: dull Bottom: glossy
Breaking Strength (Warp / Weft) ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	1100 N/5cm 1000 N/5cm	(NBN EN ISO 1421:2017) ≥ 550 N/5cm ≥ 450 N/5cm	2500 N/5cm 1800 N/5cm	2500 N/5cm 1800 N/5cm	1100 N/5cm 1000 N/5cm	2100 N/5cm 1500 N/5cm
Tear Strength (Warp / Weft) DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	(DIN EN ISO 4674/1A:2017) 60 N 30 N	-	(DIN 53363:2003) 250 N 250 N	(DIN 53363:2003) 250 N 250 N	(DIN EN ISO 4674/1A:2017) 60 N 30 N	(DIN 53363:2003) 100 N 100 N
Adhesion - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting	60 N/5cm	-	70 N/5cm	70 N/5cm	60 N/5cm	60 N/5cm
Temperature resistance EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C					
Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheid	7-8					
Fire Behaviour - ISO 3795:1989 Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	< 100 mm/min					

