

Pool



The worldwide market reference



Highest UV
and chlorine
resistance



Compliant to
NFP90306/308



All climate
appropriate




Wide standard
colour range

B7124 // B7332 //
Allround mesh // Pool mesh

B7124

NF P 90-308 compliant + versatile // Konform mit NF P 90-308 + vielseitig // Conforme à la norme NF P 90-308 + polyvalent // Cumple con NF P 90-308 + versátil // Conform NF P 90-308 + veelzijdig

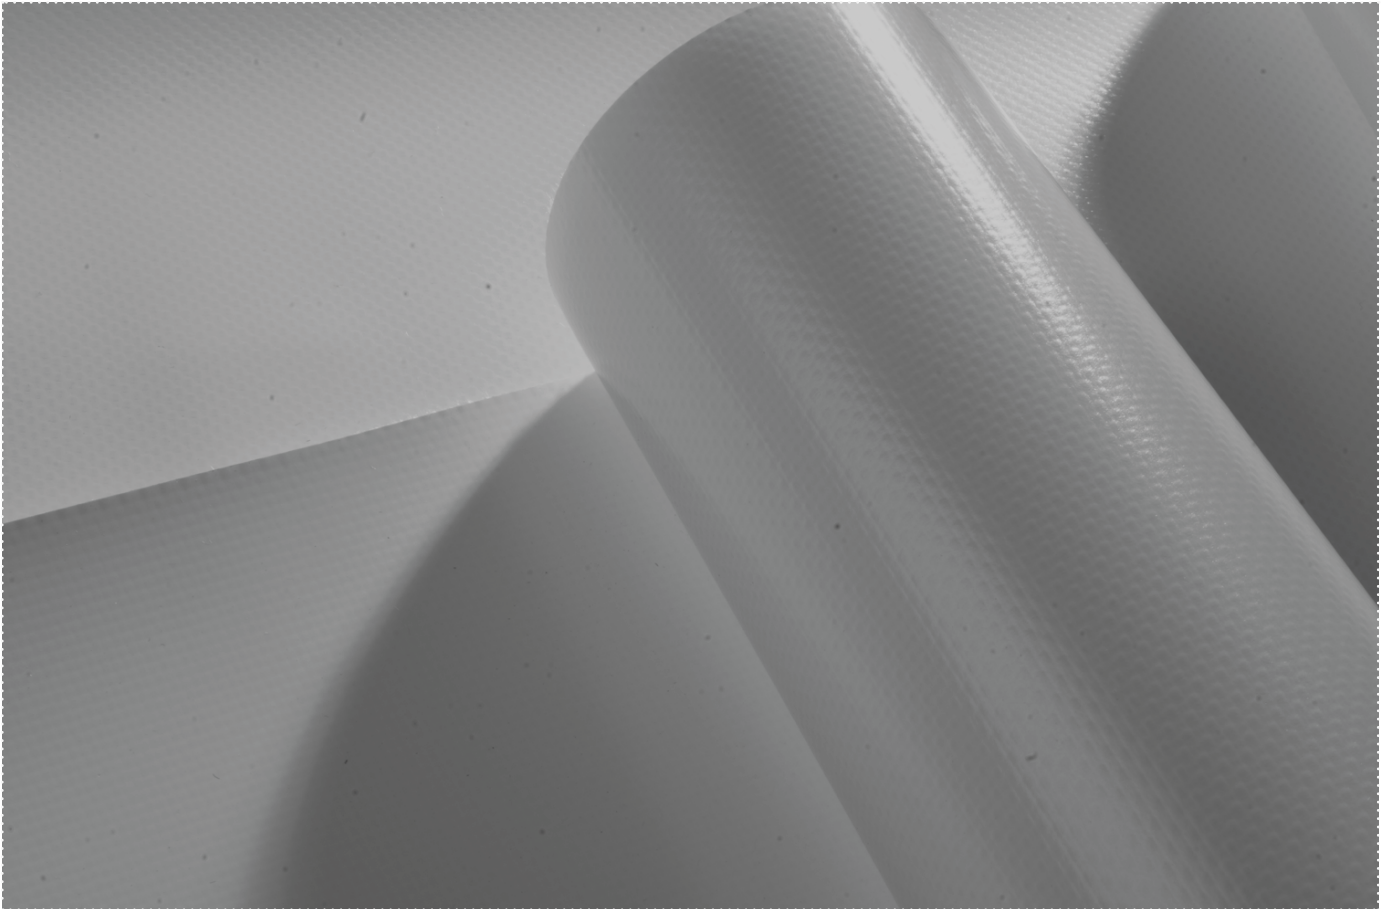

1709 (unicolor)

250 cm, 300 cm



7003 (unicolor)

300 cm



7325 (bicolor)

300 cm



7179 (unicolor)

250 cm



5068 (bicolor)

250 cm, 300 cm



6111 (bicolor)

250 cm



6194 (bicolor)

250 cm, 300 cm



6283 (bicolor)

300 cm



7285 (bicolor)

250 cm




7336 (bicolor)

250 cm

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag

B7332

NF P 90-308 compliant // Konform mit NF P 90-308 //
Conforme à la norme NF P 90-308 // Cumple con NF P
90-308 // Conform NF P 90-308

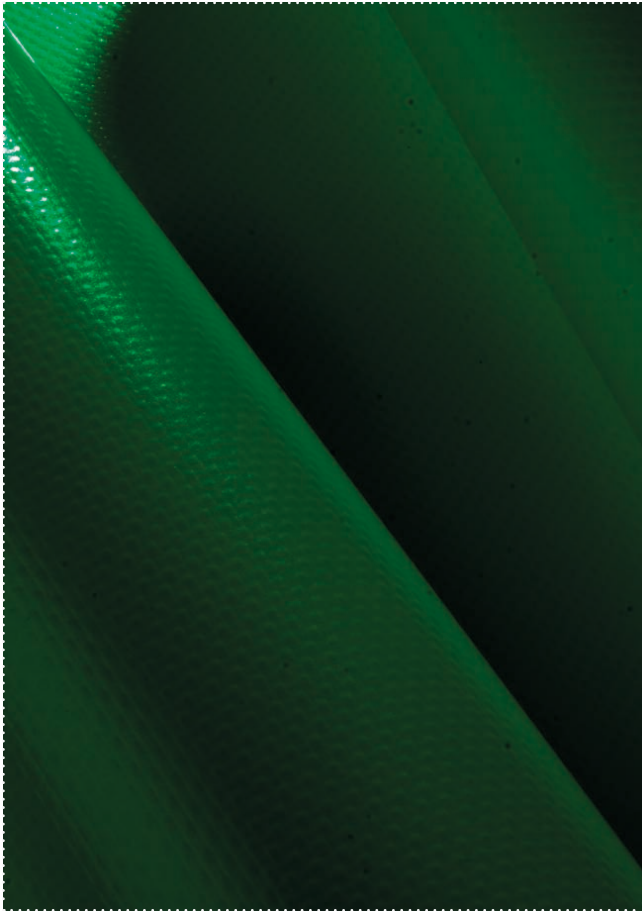


On request

Auf Anfrage // Sur demande
// Bajo pedido // Op verzoek



Pool mesh // W6060530 - M6602

NF P 90-306 compliant // Konform mit NF P 90-306 //
Conforme à la norme NF P 90-306 // Cumple con NF P
90-306 // Conform NF P 90-306

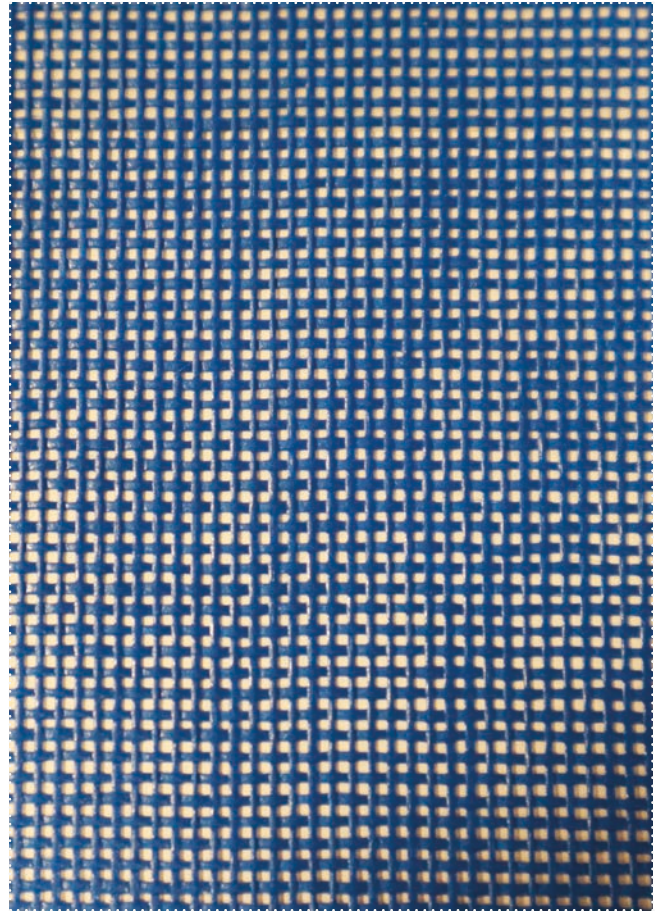


5601

On request // Auf Anfrage
// Sur demande // Bajo
pedido // Op verzoek



Allround mesh // W50500690 - M5509

Multi-use + 80% wind reduction (NF P 90-306 compliant) // Vielseitig einsetzbar + 80% Windreduzierung (Konform mit NF P 90-306) // Multi-usage + 80% de réduction du vent (Conforme à la norme NF P 90-306) // Multiuso + 80% de reducción de viento (Cumple con NF P 90-306) // Veelzijdig + 80% windreductie (Conform NF P 90-306)

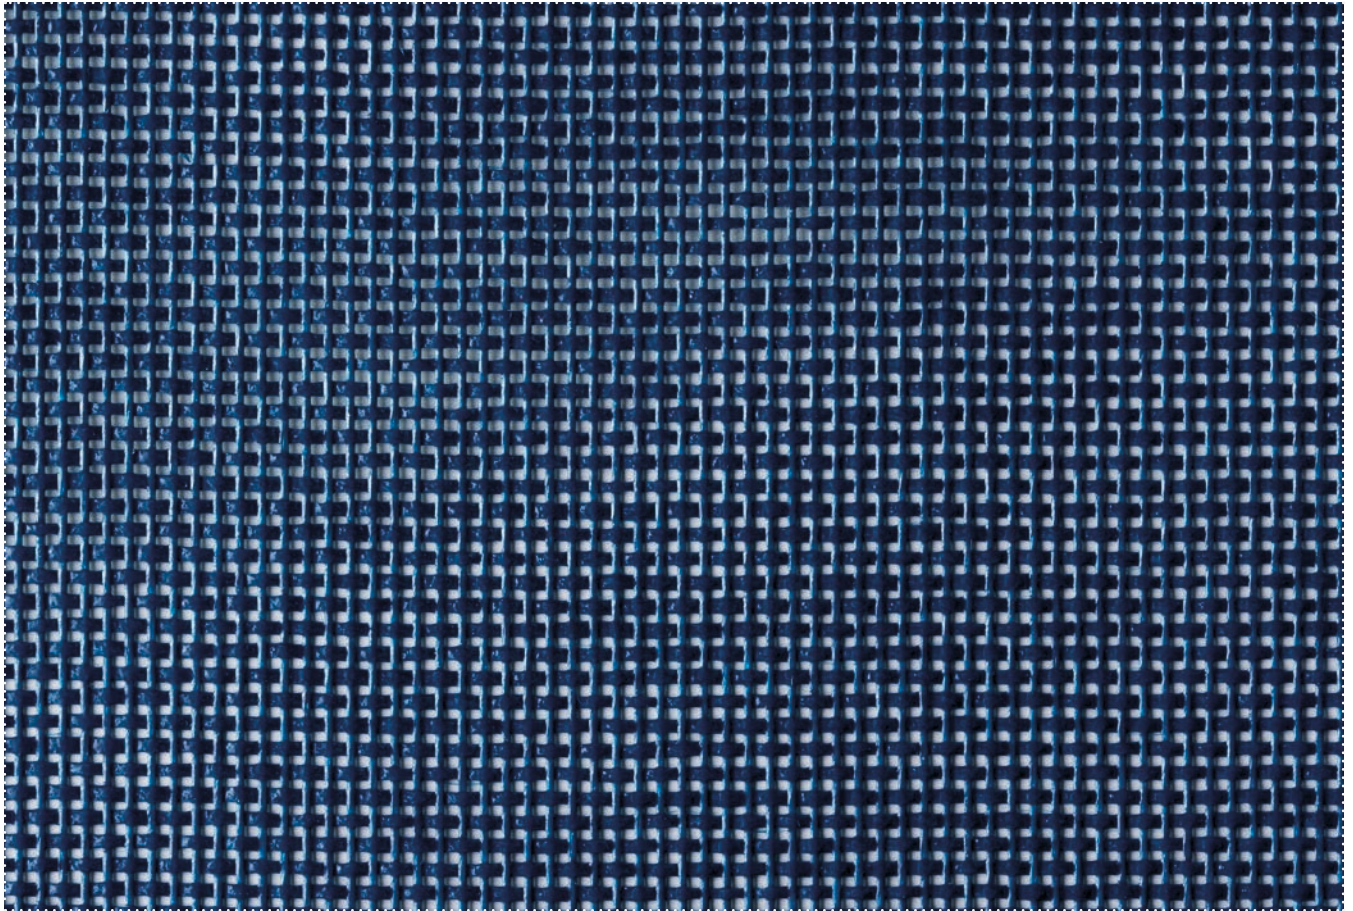

1398

↔ 210 cm



1399

↔ 210 cm, 320 cm



3130

↔ 210 cm



5601

↔ 210 cm



6168

On request // Auf Anfrage
// Sur demande // Bajo
pedido // Op verzoek



6601

↔ 210 cm, 320 cm



6602

↔ 210 cm, 320 cm



7601

↔ 210 cm




7999

↔ 210 cm, 320 cm



8104

On request // Auf Anfrage
// Sur demande // Bajo
pedido // Op verzoek



9917

↔ 210 cm

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag

Advantages

Vorteile // Avantages // Ventajas // Voordelen



Highest UV and chlorine resistance

Höchste UV- und Chlorbeständigkeit
La plus grande résistance aux UV et au chlore
Máxima resistencia a los UV y al cloro
Hoogste UV- en chloorbestendigheid



All climate appropriate

Geeignet für alle Klimatypen
Approprié à tous climats
Apropiado para todos los climas
Geschikt voor alle klimaten



Compliant to NFP90306/308

Konform mit NFP90306/308
Conforme à NFP90306/308
Cumple con NFP90306/308
Conform NFP90306/308



Wide standard colour range

Grosse Standardfarbenkollektion
Grande gamme de couleurs standards
Amplia gama de colores estándar
Groot assortiment standaardkleuren



Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	B7124 NF P 90-308 compliant + versatile	B7332 NF P 90-308 compliant	Allround mesh W50500690 - M5509 Multi-use + 80% wind reduction (NF P 90-306 compliant)	Pool mesh W6060530 - M6602 NF P 90-306 compliant
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	580 g/m²	650 g/m²	250 g/m²	275 g/m²
Composition Zusammensetzung // Composition // Composición // Samenstelling			PES + PVC	
Fabric (Warp / Weft) DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel			PES, 1100 dtex PES, 1100 dtex	
Lacquering Lackierung // Laquage // Tipo lacado // Lacquering	Top: glossy Bottom: glossy	Top: glossy Bottom: glossy	-	-
Breaking Strength (Warp / Weft) ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	2500 N/5cm 2000 N/5cm	2500 N/5cm 2000 N/5cm	≥ 1600 N/5cm ≥ 1600 N/5cm	(NBN EN ISO 1421:2017) ≥ 1600 N/5cm ≥ 1600 N/5cm
Tear Strength (Warp / Weft) DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	270 N 270 N	270 N 270 N	≥ 400 N ≥ 400 N	≥ 400 N ≥ 400 N
Adhesion - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting	60 N/5cm	90 N/5cm	-	-
Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C	-40/+70 °C	-30/+70 °C	-30/+70 °C
Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit	7-8	7-8	6-8	6-8
Fire Behaviour - ISO 3795:1989 Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	< 100 mm/min	< 100 mm/min	-	-



Registration,
Evaluation,
Authorization
and restriction
of Chemicals



Recyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



Sustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar