

# Pool



## The worldwide market reference



Highest UV  
and chlorine  
resistance



Compliant to  
NFP90306/308



All climate  
appropriate




Wide standard  
colour range

**B7124 // B7332 //**  
**Allround mesh // Pool mesh**

# B7124

NF P 90-308 compliant + versatile // Konform mit NF P 90-308 + vielseitig // Conforme à la norme NF P 90-308 + polyvalent // Cumple con NF P 90-308 + versátil // Conform NF P 90-308 + veelzijdig

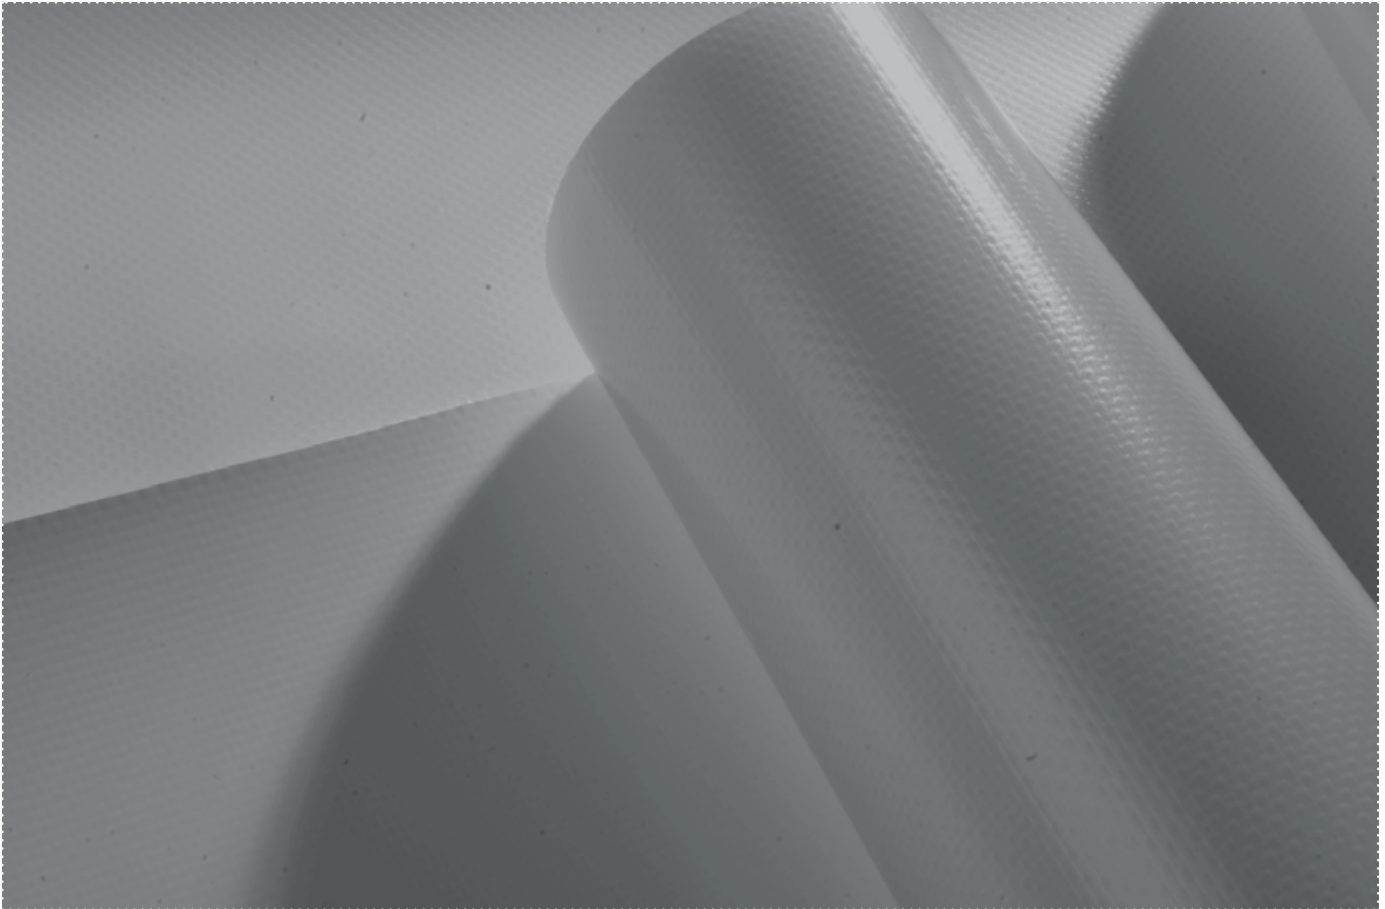

**1709** (unicolor)  
250 cm, 300 cm



**7003** (unicolor)  
300 cm



**7325** (bicolor)  
300 cm



**7179** (unicolor)  
250 cm



**5068** (bicolor)  
250 cm, 300 cm



**6111** (bicolor)  
250 cm



**6194** (bicolor)  
250 cm, 300 cm



**6283** (bicolor)  
300 cm



**7285** (bicolor)  
250 cm




**7336** (bicolor)  
250 cm

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //  
Otros colores bajo pedido // Andere kleuren op aanvraag

## B7332

NF P 90-308 compliant // Konform mit NF P 90-308 //  
Conforme à la norme NF P 90-308 // Cumple con NF P  
90-308 // Conform NF P 90-308

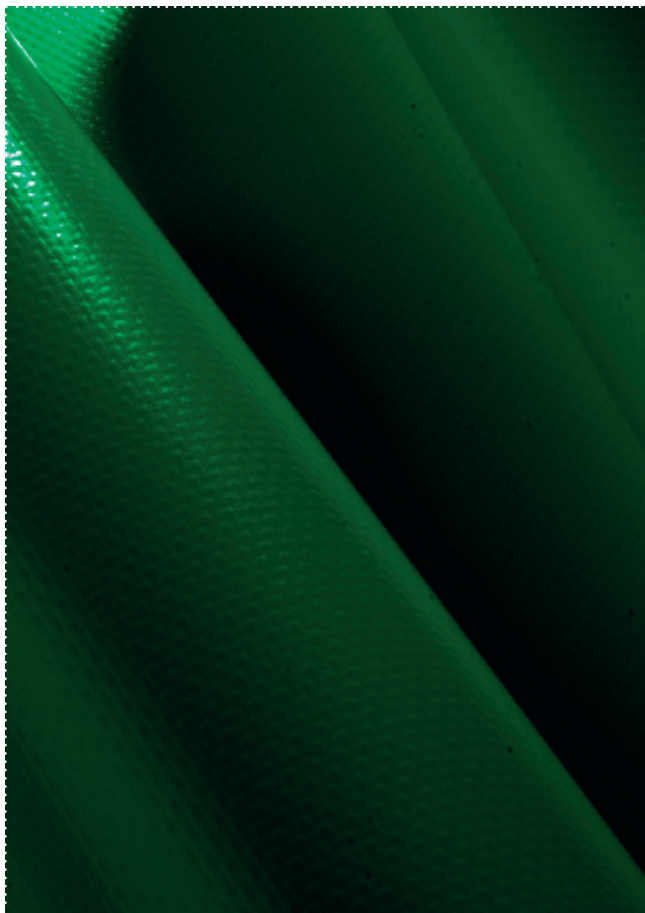


### On request

Auf Anfrage // Sur demande  
// Bajo pedido // Op verzoek



## Pool mesh // W60605300 - M6602

NF P 90-306 compliant // Konform mit NF P 90-306 //  
Conforme à la norme NF P 90-306 // Cumple con NF P  
90-306 // Conform NF P 90-306

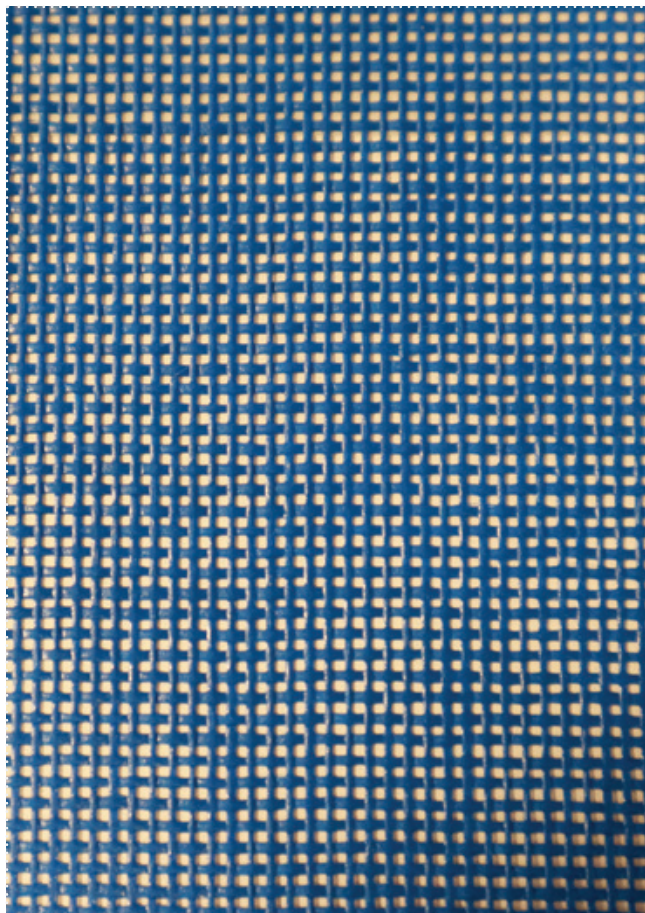


**5601**

On request // Auf Anfrage  
// Sur demande // Bajo  
pedido // Op verzoek



## Allround mesh // W50500690 - M5509

Multi-use + 80% wind reduction (NF P 90-306 compliant) // Vielseitig einsetzbar + 80% Windreduzierung (Konform mit NF P 90-306) // Multi-usage + 80% de réduction du vent (Conforme à la norme NF P 90-306) // Multiuso + 80% de reducción de viento (Cumple con NF P 90-306) // Veelzijdig + 80% windreductie (Conform NF P 90-306)

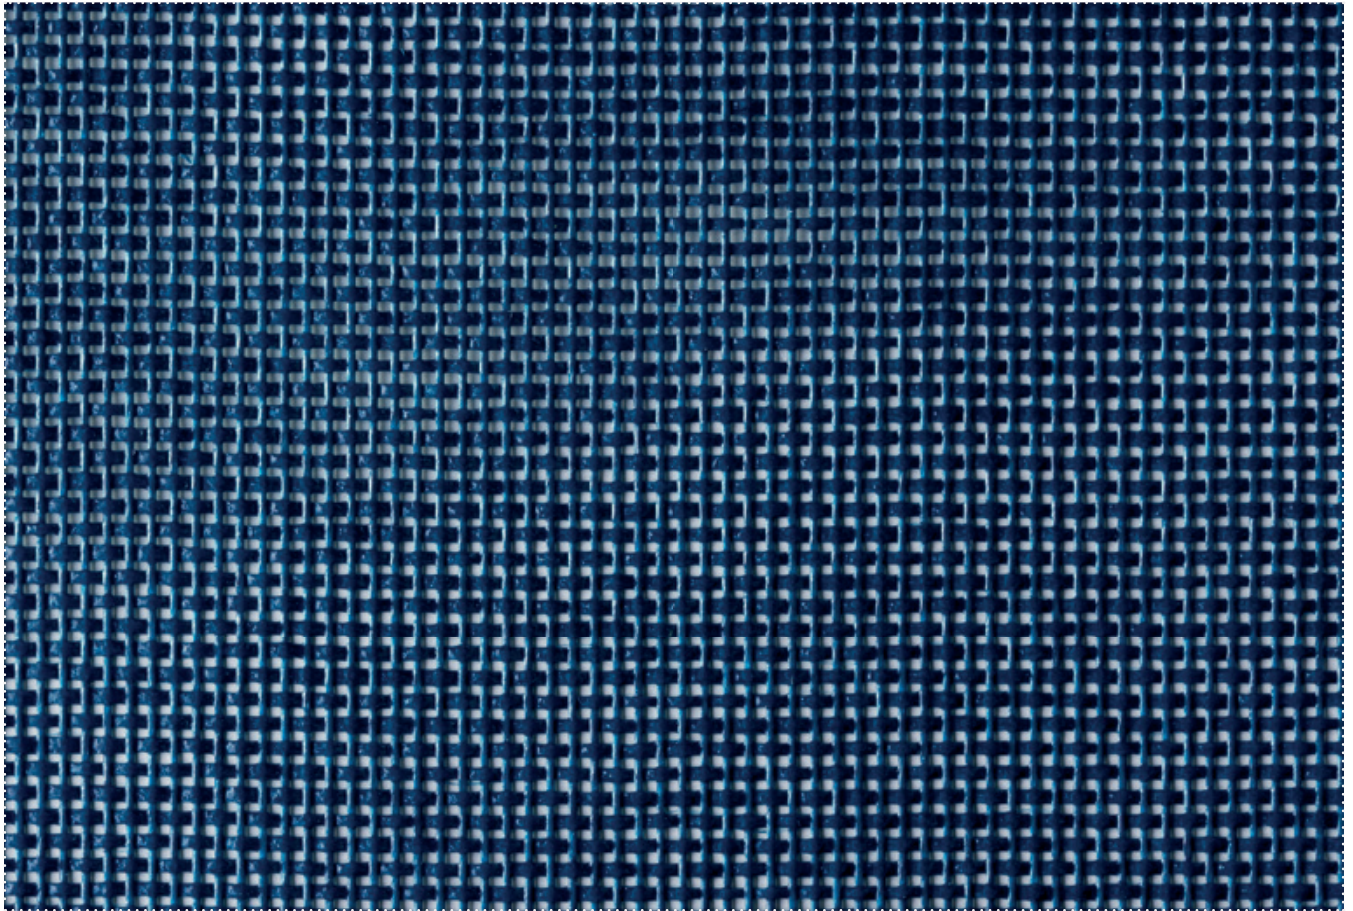

**1398**

↔ 210 cm



**1399**

↔ 210 cm, 320 cm



**3130**

↔ 210 cm



**5601**

↔ 210 cm



**6168**

On request // Auf Anfrage  
// Sur demande // Bajo  
pedido // Op verzoek



**6601**

↔ 210 cm, 320 cm



**6602**

↔ 210 cm, 320 cm



**7601**

↔ 210 cm




**7999**

↔ 210 cm, 320 cm



**8104**

On request // Auf Anfrage  
// Sur demande // Bajo  
pedido // Op verzoek



**9917**

↔ 210 cm

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //  
Otros colores bajo pedido // Andere kleuren op aanvraag

## Advantages

Vorteile // Avantages // Ventajas // Voordelen



### Highest UV and chlorine resistance

Höchste UV- und Chlorbeständigkeit  
La plus grande résistance aux UV et au chlore  
Máxima resistencia a los UV y al cloro  
Hoogste UV- en chloorbestendigheid



### All climate appropriate

Geeignet für alle Klimatypen  
Approprié à tous climats  
Apropiado para todos los climas  
Geschikt voor alle klimaten



### Compliant to NFP90306/308

Konform mit NFP90306/308  
Conforme à NFP90306/308  
Cumple con NFP90306/308  
Conform NFP90306/308



### Wide standard colour range

Grosse Standardfarbenkollektion  
Grande gamme de couleurs standards  
Amplia gama de colores estándar  
Groot assortiment standaardkleuren



## Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	<b>B7124</b> NF P 90-308 compliant + versatile	<b>B7332</b> NF P 90-308 compliant	<b>Allround mesh</b> <b>W50500690 - M5509</b> Multi-use + 80% wind reduction (NF P 90-306 compliant)	<b>Pool mesh</b> <b>W60605300 - M6602</b> NF P 90-306 compliant
<b>Total Weight</b> - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	<b>580 g/m<sup>2</sup></b>	<b>650 g/m<sup>2</sup></b>	<b>250 g/m<sup>2</sup></b>	<b>275 g/m<sup>2</sup></b>
<b>Composition</b> Zusammensetzung // Composition // Composición // Samenstelling			PES + PVC	
<b>Fabric (Warp / Weft)</b> DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel			PES, 1100 dtex PES, 1100 dtex	
<b>Lacquering</b> Lackierung // Laquage // Tipo lacado // Lacquering	Top: glossy Bottom: glossy	Top: glossy Bottom: glossy	-	-
<b>Breaking Strength (Warp / Weft)</b> ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	<b>2500 N/5cm</b> <b>2000 N/5cm</b>	<b>2500 N/5cm</b> <b>2000 N/5cm</b>	<b>≥ 1600 N/5cm</b> <b>≥ 1600 N/5cm</b>	(NBN EN ISO 1421_2017) <b>≥ 1600 N/5cm</b> <b>≥ 1600 N/5cm</b>
<b>Tear Strength (Warp / Weft)</b> DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	<b>270 N</b> <b>270 N</b>	<b>270 N</b> <b>270 N</b>	<b>≥ 400 N</b> <b>≥ 400 N</b>	<b>≥ 400 N</b> <b>≥ 400 N</b>
<b>Adhesion</b> - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting	60 N/5cm	90 N/5cm	-	-
<b>Temperature resistance</b> - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C	-40/+70 °C	-30/+70 °C	-30/+70 °C
<b>Light Fastness</b> - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit	7-8	7-8	6-8	6-8
<b>Fire Behaviour</b> - ISO 3795:1989 Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	< 100 mm/min	< 100 mm/min	-	-



Registration,  
Evaluation,  
Authorization  
and restriction  
of Chemicals



Recyclable fabric  
Recyclable Textilien  
Textiles recyclables  
Productos reciclables  
Recycleerbaar textiel



Slitting (width) on request  
Schneiden (Breite) auf Anfrage  
Tronçonnage (largeur) sur demande  
Cortar (ancho) bajo pedido  
Snijden (breedte) op aanvraag



Sustainable options available  
Nachhaltige Optionen verfügbar  
Options durables disponibles  
Opciones sostenibles disponibles  
Duurzame opties beschikbaar