



Glamping

NEW range



Luxurious glamping tent fabrics



Deluxe dull embossing



Dirt repelling lacquering



UV resistant



Flame retardant

10

years warranty

B8176 // B8276



Advantages

Vorteile // Avantages // Ventajas // Voordelen



Deluxe dull embossing

Deluxe-Mattprägung
Gaufrage de luxe mat
Cofrado mate de lujo
Luxe matte kalender



UV resistant

UV-beständig
Résistant aux UV
Resistente a los UV
UV-bestendig



Dirt repelling lacquering

Schmutzabweisende
Lackierung
Laquage anti-salissures
Lacado repelente de la
suciedad
Vuilafstotende lak




Flame retardant

Flammhemmend
Ignifuge
Ignífugo
Vlamvertragend


Layered membrane

- Highly protective lacquer
- Highly protective lacquer
- FR PVC coating layer
- High tenacity polyester fabric
- FR PVC Coating layer
- Highly protective lacquer

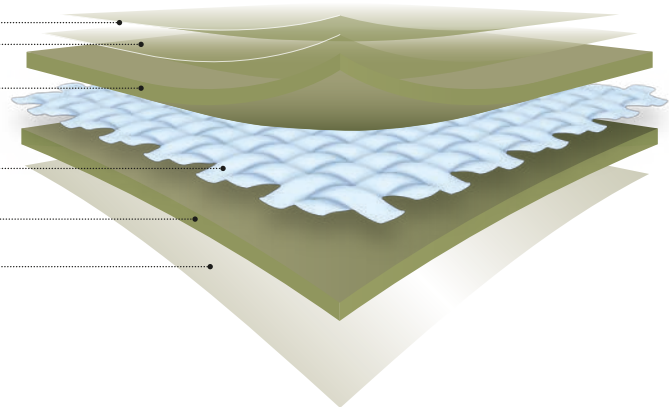


B8176 NEW

Glamping roof // Glamping - Dach // Glamping - toit //
Glamping - techo // Glamping - dak

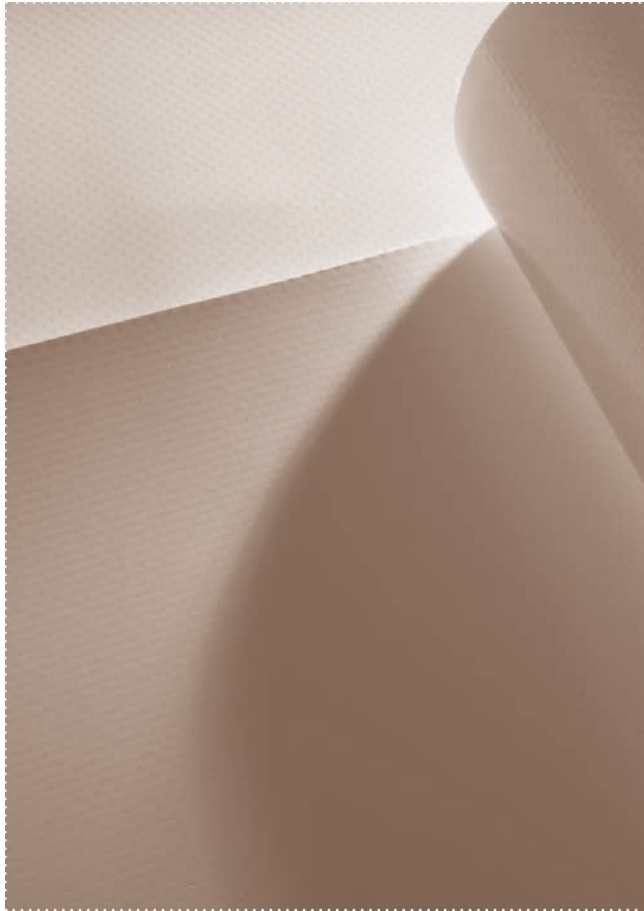

B8276 NEW

Glamping roof (block out) // Glamping - Dach (super undurchsichtig) // Glamping - toit (super opaque) // Glamping - techo (super opaco) // Glamping - dak (super opaak)

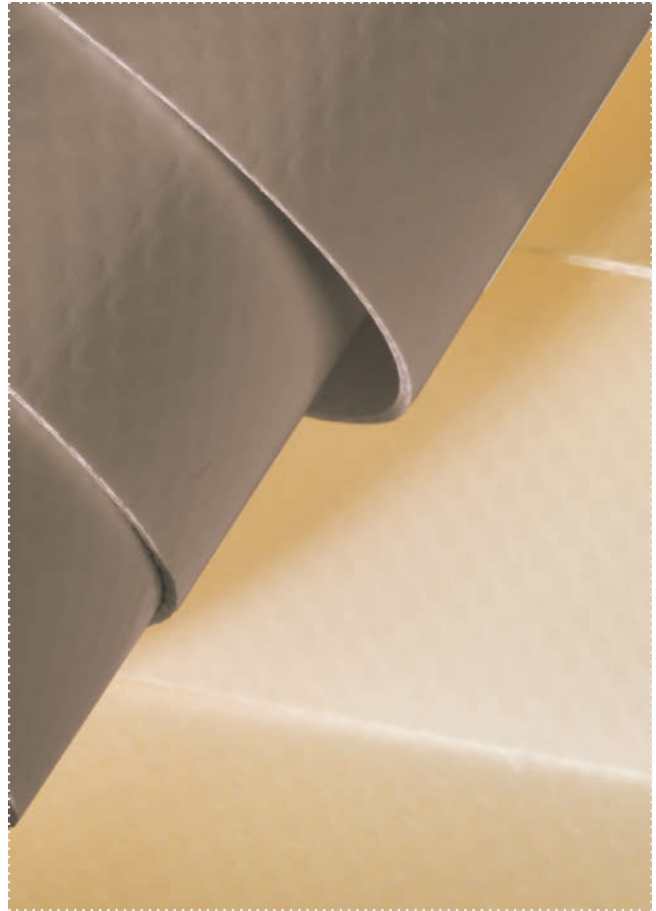

Beige

1940 - RAL 1001


↔ 300 cm



Moss green

6434

On request // Auf Anfrage
// Sur demande // Bajo pedido // Op verzoek



Light ivory

1658 - RAL 1015

↔ 300 cm



Moss green & Beige

6435

On request // Auf Anfrage
// Sur demande // Bajo pedido // Op verzoek



Taupe & Beige

7450

↔ 300 cm



Coyote & Cougar pelt

8120

↔ 300 cm



Taupe

7931 - RAL 7006

↔ 300 cm



Coyote

8104

↔ 300 cm



Starlight

9002

↔ 300 cm

Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

| | B8176 Glamping roof | B8276 Glamping roof (block out) |
|---|--|------------------------------------|
| Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht | 650 g/m² | 850 g/m² |
| Composition Zusammensetzung // Composition // Composición // Samenstelling | PES + PVC | |
| Fabric (Warp / Weft) - DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel | PES, 1100 dtex PES, 1100 dtex | |
| Lacquering Lackierung // Laquage // Tipo lacado // Lacquering | Top: glossy (dirt repelling) Bottom glossy (dirt repelling) | |
| Embossing Prägung // Gaufrage // Gofrado // Kalander | Super dull // Super matt // Super mat // Super mate // Super mat | |
| Breaking Strength (Warp / Weft) ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte | 2500 N/5cm 2500 N/5cm | |
| Tear Strength (Warp / Weft) - DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarrar // Scheurweerstand | 270 N 270 N | |
| Adhesion - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting | 100 N/5cm | |
| Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid | -40/+70 °C | |
| Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheid | 7-8 | |
| Fire Behaviour M2 (NF P 92-507:2004) B1 (DIN 4102-1:1998) Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag | M2 B1 | |
| Reaction to Fire - EN 13501-1:2018 Reaktion auf Feuer // Réaction au feu // Reacción al fuego // Reactie op vuur | B-s2,d0 | |



Registration,
Evaluation,
Authorization
and restriction
of Chemicals



Recyclable fabric
Recyclable Textiles
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



Sustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar