



Pergola



Adding that extra touch of luxury



Different contemporary embossings



100% block out



Flame retardant




Highly UV resistant

B8115 // B8118

B8115

Block out // Super undurchsichtig // Super opaque // Super opaco // Super opaak

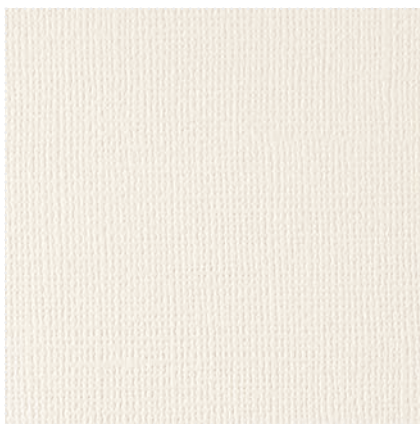

1932

↔ 300 cm



7278

↔ 300 cm




9002

↔ 300 cm

*Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag*

B8118

Cube embossing // Würfelpprägung // Gaufrage en cube // Acabado en cubo // Kubus embossing

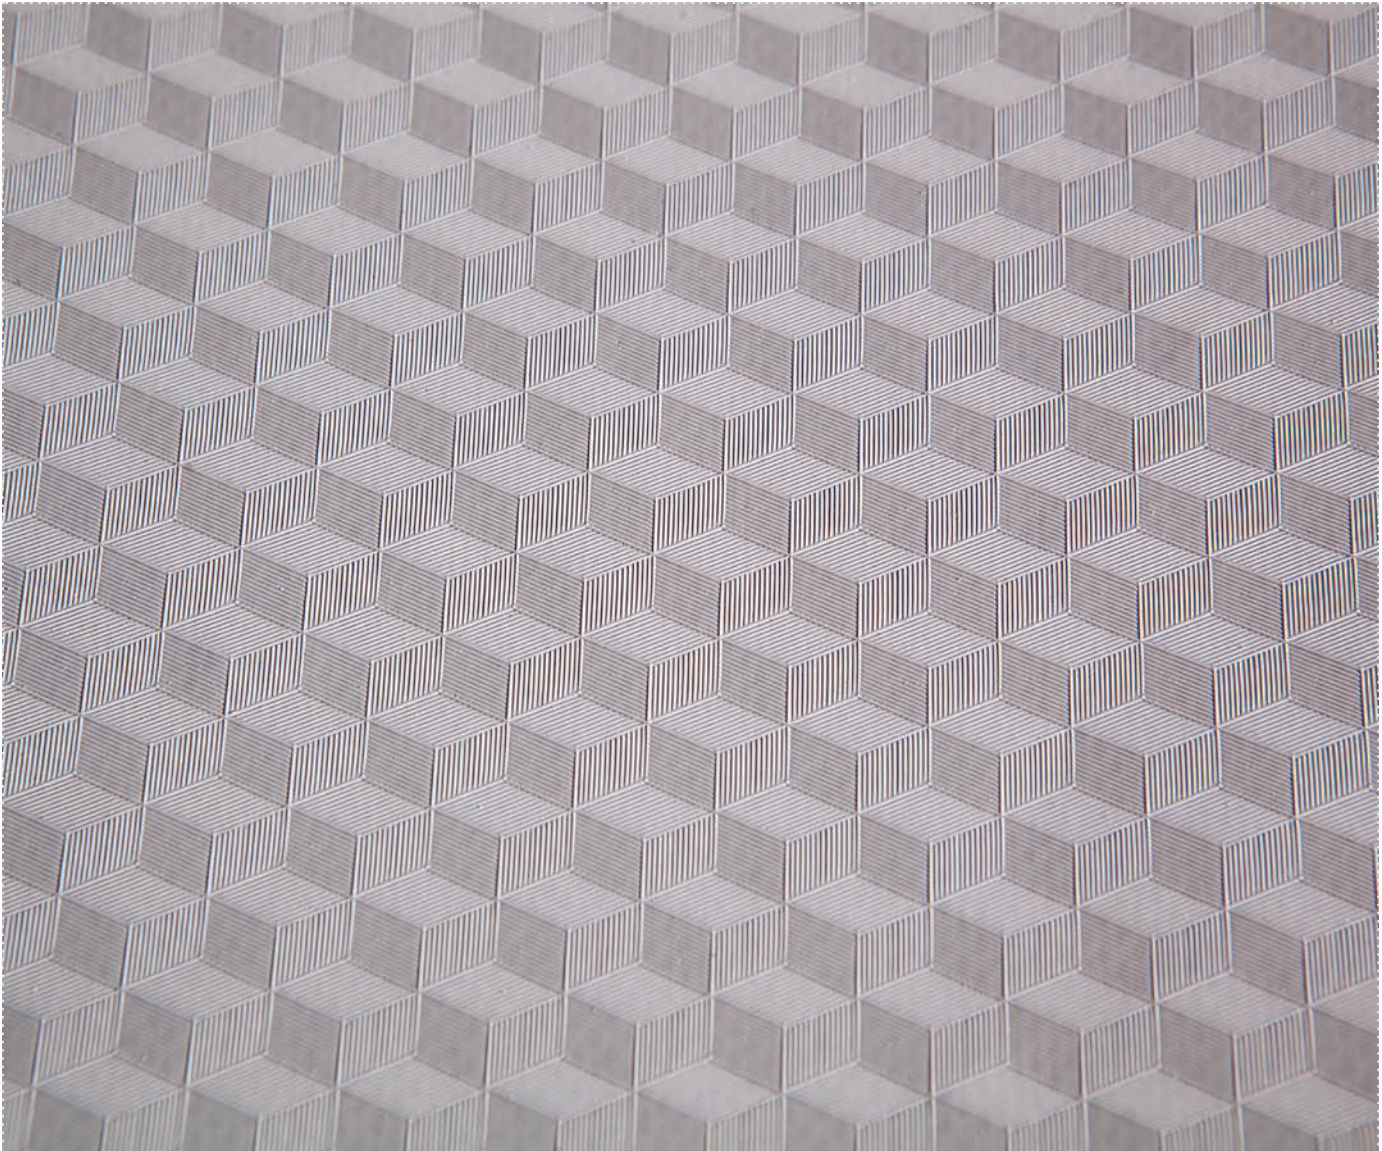


1622

←→ 300 cm



7024

←→ 300 cm

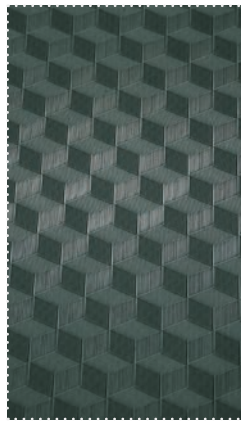

7340 NEW

←→ 300 cm



7500

←→ 300 cm



9002

←→ 300 cm

*Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag*



Advantages



Vorteile // Avantages // Ventajas // Voordelen



Different contemporary embossings

Verschiedene zeitgemässe Prägungen
Différents gaufrages contemporains
Varios acabados contemporáneos
Verschillende hedendaagse embossings



Flame retardant

Flammhemmend
Ignifuge
Ignífugo
Vlamvertragend



100% block out

100% super undurchsichtig
100% super opaque
100% super opaco
100% super opaak



Highly UV resistant

Sehr UV-beständig
Très résisant aux UV
Muy resistente a los UV
In hoge mate UV-bestendig



Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	B8115 Block out	B8118 Cube embossing
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	850 g/m²	
Composition Zusammensetzung // Composition // Composición // Samenstelling	PES + PVC	
Fabric (Warp / Weft) - DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel	PES, 1100 dtex PES, 1100 dtex	
Lacquering Lackierung // Laquage // Tipo lacado // Lacquering	Top: dull non marring Bottom: dull	Top: glossy Bottom: glossy
Breaking Strength (Warp / Weft) - ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	2500 N/5cm 2300 N/5cm	
Tear Strength (Warp / Weft) - DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	270 N 270 N	
Adhesion - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting	100 N/5cm	
Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C	
Light Fastness - ISO 105 B02:2014 Lichtechtheit // Tenue à la lumière // Solidez color // Lichtechtheit	7-8	
Fire Behaviour Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	(UNI 8456 - 9174) ADR Cl. II	(NF P92-507:2004) M2
Reaction to Fire - EN 13501-1:2018 Reaktion auf Feuer // Réaction au feu // Reacción al fuego // Reactie op vuur	B-s2,d0	



Registration,
Evaluation,
Authorization
and restriction
of Chemicals



Recyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



Sustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar