





Sun Protection

NEW

Outdoor and indoor solar screen fabric

Excellent dimensional stability //
Ausgezeichnete Formstabilität //
Excellente stabilité dimensionnelle //
Excelente estabilidad dimensional //
Uitstekende dimensionale stabiliteit

S5632

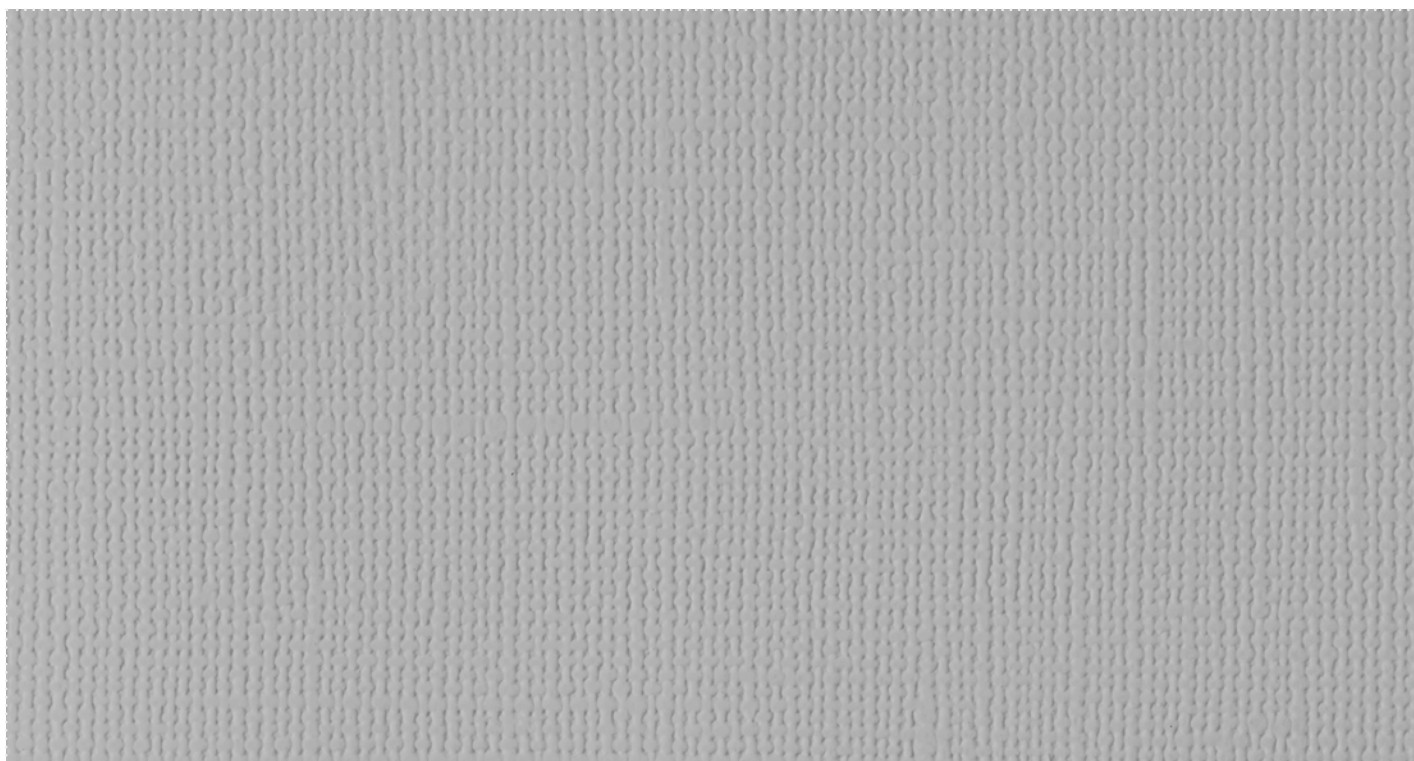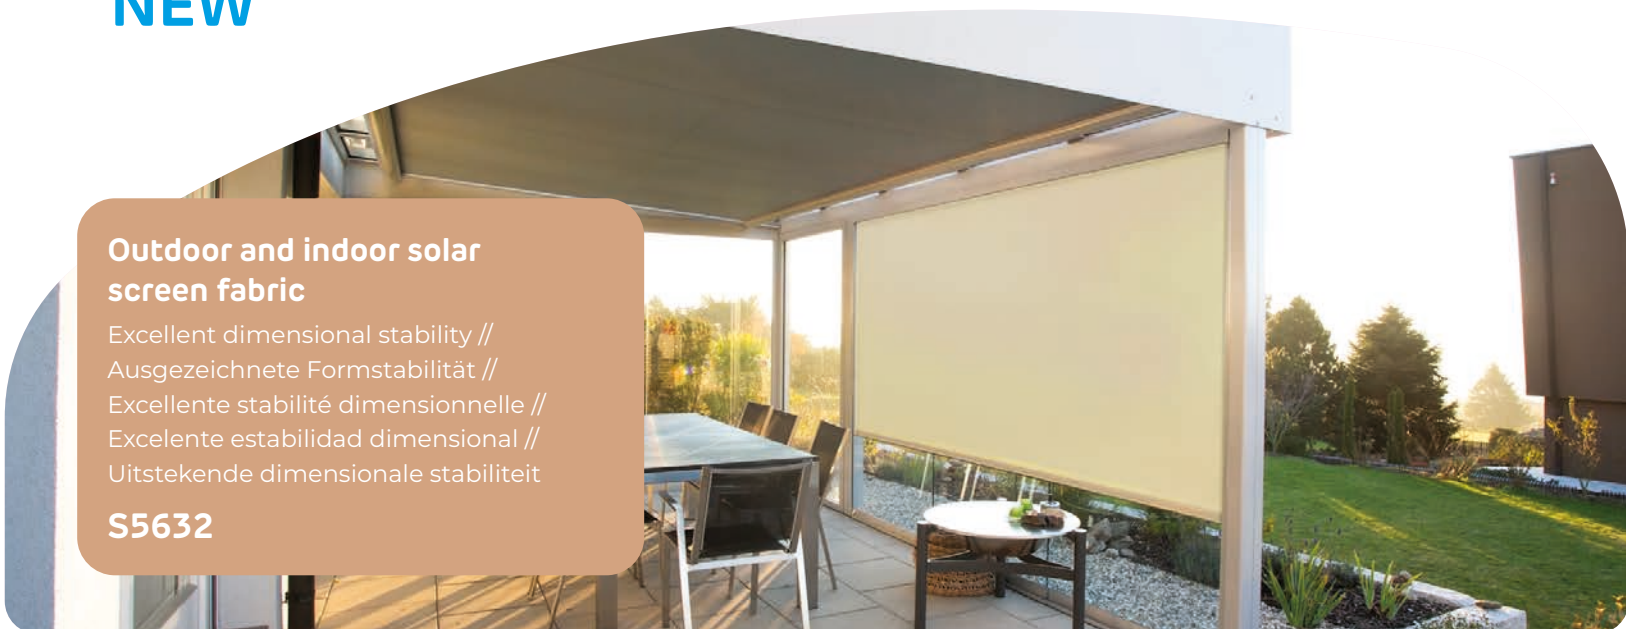

1932

↔ 300 cm



4014

On request // Auf Anfrage
// Sur demande // Bajo
pedido // Op verzoek



7003

↔ 300 cm



7185

↔ 300 cm



7931

On request // Auf Anfrage
// Sur demande // Bajo
pedido // Op verzoek



Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	S5632
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	720 g/m²
Composition Zusammensetzung // Composition // Composición // Samenstelling	PES (monofilament) + PVC
Fabric (Warp / Weft) - DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel	PES, 550 dtex PES, 550 dtex
Lacquering Lackierung // Laquage // Tipo lacado // Lacquering	Top: dull Bottom: dull
Breaking Strength (Warp / Weft) ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	1900 N/5cm 1900 N/5cm
Tear Strength (Warp / Weft) - DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	150 N 150 N
Adhesion - ISO 2411:2017 Haftung // Adhèrence // Adhesión // Hechting	60 N/5cm
Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C
Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit	7-8
Fire Behaviour - NF P 92-507:2004 Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	M2

Samples: on request

Muster: auf Anfrage // Échantillons : sur demande // Muestras: a petición // Stalen: op aanvraag

Advantages

Vorteile // Avantages // Ventajas // Voordelen



Excellent dimensional stability
Ausgezeichnete Formstabilität
Excellente stabilité dimensionnelle
Excelente estabilidad dimensional
Uitstekende dimensionale stabiliteit



UV and weather resistant
UV- und witterungsbeständig
Résistant aux UV et aux intempéries
Resistente a los UV y a la intemperie
UV- en weersbestendig



Anti-bacterial
Antibakteriell
Antibactérien
Antibacteriano
Anti-bacterieel



100% block out
100% super undurchsichtig
100% super opaque
100% super opaco
100% super opaak



Registration, Evaluation, Authorization and restriction of Chemicals



Recyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



Sustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar



your guide to coated fabrics

Go to sioline.com for more information.
Fabriekstraat 23 - 8850 Ardoois - Belgium
+32 (0) 51 740 900 - info@sioline.com - sioline.com



Produced in Belgium & France in ISO 9001:2015 certified plants

All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. All Sioline products comply with the Reach Regulation 1907/2006/CE. Last modified: 15 januari 2024 8:40 a.m.

