

Advantages

Vorteile // Avantages // Ventajas // Voordelen

Extremely wide colour range
Extrem grosse Farbpalette
Très large gamme de couleurs
Gama de colores muy amplia
Zeer breed kleurengamma

Standard M1 option
Standard M1 Option
Standard M1 en option
Opción estándar M1
Standaard M1 optie

Standard M0 (silicone-coated glass fabric) option
Standard M0 (Silikonbeschichtetes Glasgewebe) Option
Standard M0 (tissu de verre enduit en silicone) en option
Opción estándar M0 (tejido de vidrio recubierto de silicona)
Standaard M0 (silicone-gecoated glasweefsel) optie

Anti-static high speed door quality (B6701)
Antistatische Schnellrolltorqualität
Qualité porte à grande vitesse - anti-statique
Calidad de puerta rápida antiestática
Kwaliteit antistatische snelroldeur

Thermal and sound insulation

B6353: PVC foam-coated product for both thermal and sound insulation

PVC schaumbeschichtetes Produkt für thermische Isolierung sowie Lärmdämmung

PVC moussé pour l'isolation thermique et sonore

PVC con espuma para el aislamiento térmico y acústico

PVC met schuimcoating voor warmte- en geluidsisolatie

CATALOGUE

Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	B6000 Market reference	B6134 Flame retardant	B6701 Anti-static	S2100 Heat resistant up to 180°C	B6353 Foamed
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	900 g/m²	900 g/m²	1700 g/m²	480 g/m²	1450 g/m²
Composition Zusammensetzung // Composition // Composición // Samenstelling	PES + PVC	PES + PVC	PES + PVC	Glass fabric + Silicone	PES + PVC
Fabric (Warp / Weft) - DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	PES, 1100 dtex PES, 1100 dtex	Glass, 1360 dtex Glass, 1360 dtex	PES, 1100 dtex PES, 1100 dtex
Lacquering Lackierung // Laquage // Tipo lacado // Lacquering	Top: glossy Bottom: glossy	Top: glossy Bottom: glossy	Top: glossy Bottom: glossy	-	Top: glossy Bottom: glossy
Breaking Strength (Warp / Weft) ISO 1421/2:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	4000 N/5cm 4000 N/5cm	4000 N/5cm 4000 N/5cm	4000 N/5cm 4000 N/5cm	1500 N/5cm 1500 N/5cm	4000 N/5cm 3500 N/5cm
Tear Strength (Warp / Weft) DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	600 N 500 N	600 N 500 N	600 N 600 N	180 N 180 N	600 N 500 N
Adhesion - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hechting	100 N/5cm	120 N/5cm	100 N/5cm	60 N/5cm	120 N/5cm
Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-40/+70 °C	-40/+70 °C	-30/+70 °C	-50/+180 °C	-30/+70 °C
Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit			7-8		
Surface Resistivity - DIN 54345 T1:1992 Oberflächenwiderstand // Surface résistivité // Resistividad de superficie // Oppervlakte weerstand	-	-	< 1.10E09 Ohm	-	-
Fire Behaviour Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	(ISO 3795:1989) < 100 mm/min	(NF P 92 507:2004) M2 (DIN 4102-1:1998) B1	(ISO 3795:1989) < 100 mm/min	(NF P 92 507:2004) M0	(NF P 92 507:2004) M2
Reaction to Fire - EN 13501-1:2018 Reaktion auf Feuer // Réaction au feu // Reacción al fuego // Reactie op vuur	-	B-s2,d0	-	A2-s1,d0	-



Registration,
Evaluation,
Authorization
and restriction
of Chemicals



Recyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



Sustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar



Go to [sicline.com](https://www.sicline.com) for more information.
Fabriekstraat 23 - 8850 Ardooie - Belgium
+32 (0) 51 740 900 - info@sicline.com - [sicline.com](https://www.sicline.com)

 Produced in Belgium & France in ISO 9001:2015 certified plants

All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. All Sicline products comply with the Reach Regulation 1907/2006/CE. Last modified: 3 february 2026 12:01 p.m.



Industry



Industrial applications such as
partition walls, high speed doors, ...



Wide colour
range



Standard M0
(silicone-coated
glass fabric) option



Standard M1
option



Anti-static high speed
door quality (B6701)

B6000 // B6134 // B6701 //
S2100 // B6353



B6353

Foamed // Geschäumt // Moussé // Espumado //
Geschuimd




7024

250 cm



9002



250 cm

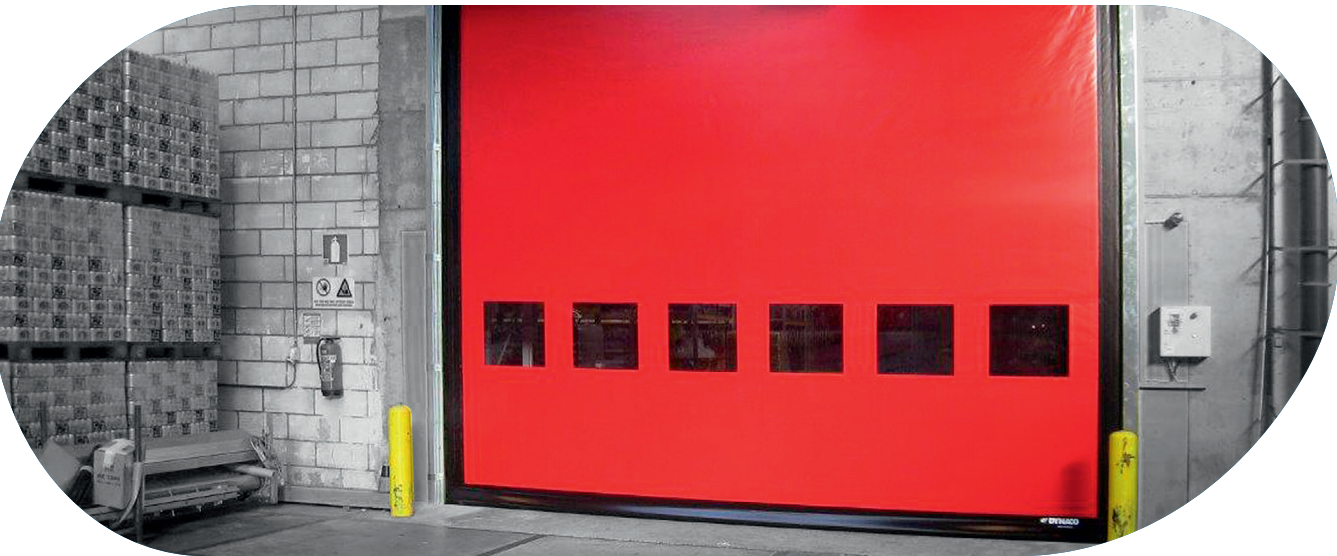


Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag

B6000

Market reference // Marktreferenz // Référence du marché // Referencia del mercado // Marktreferentie

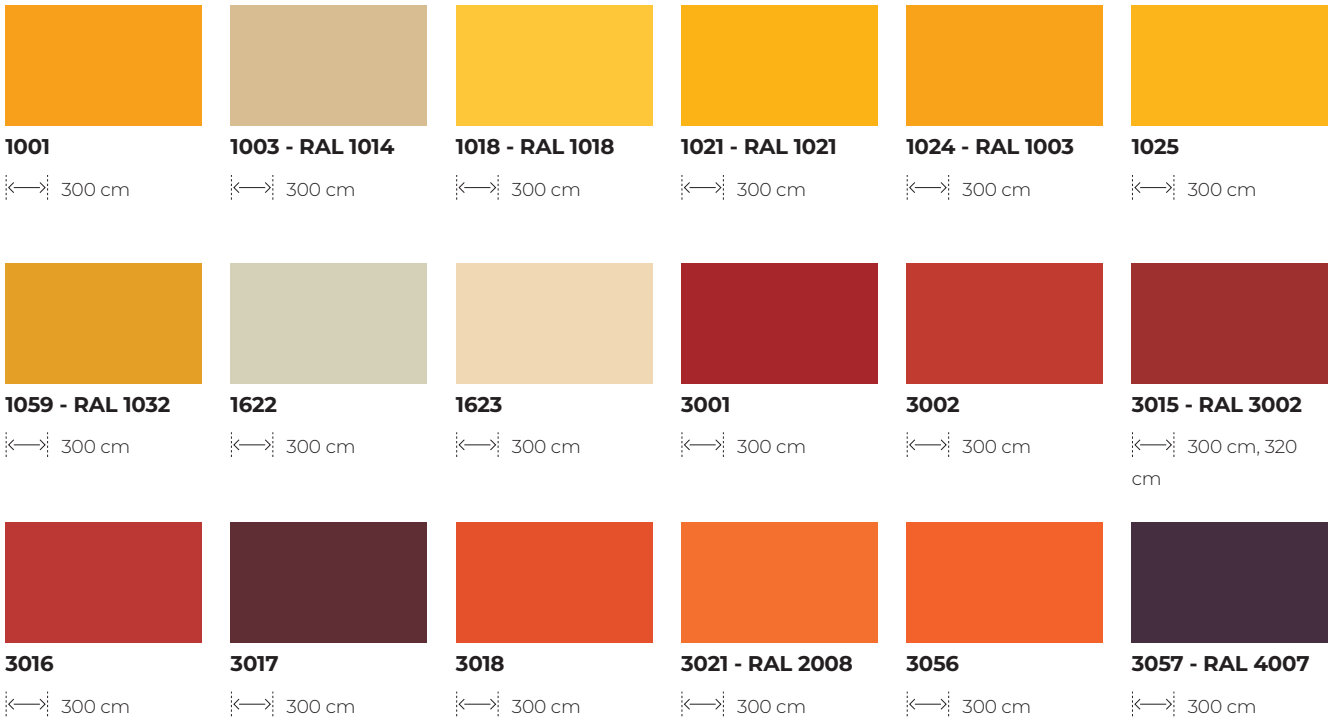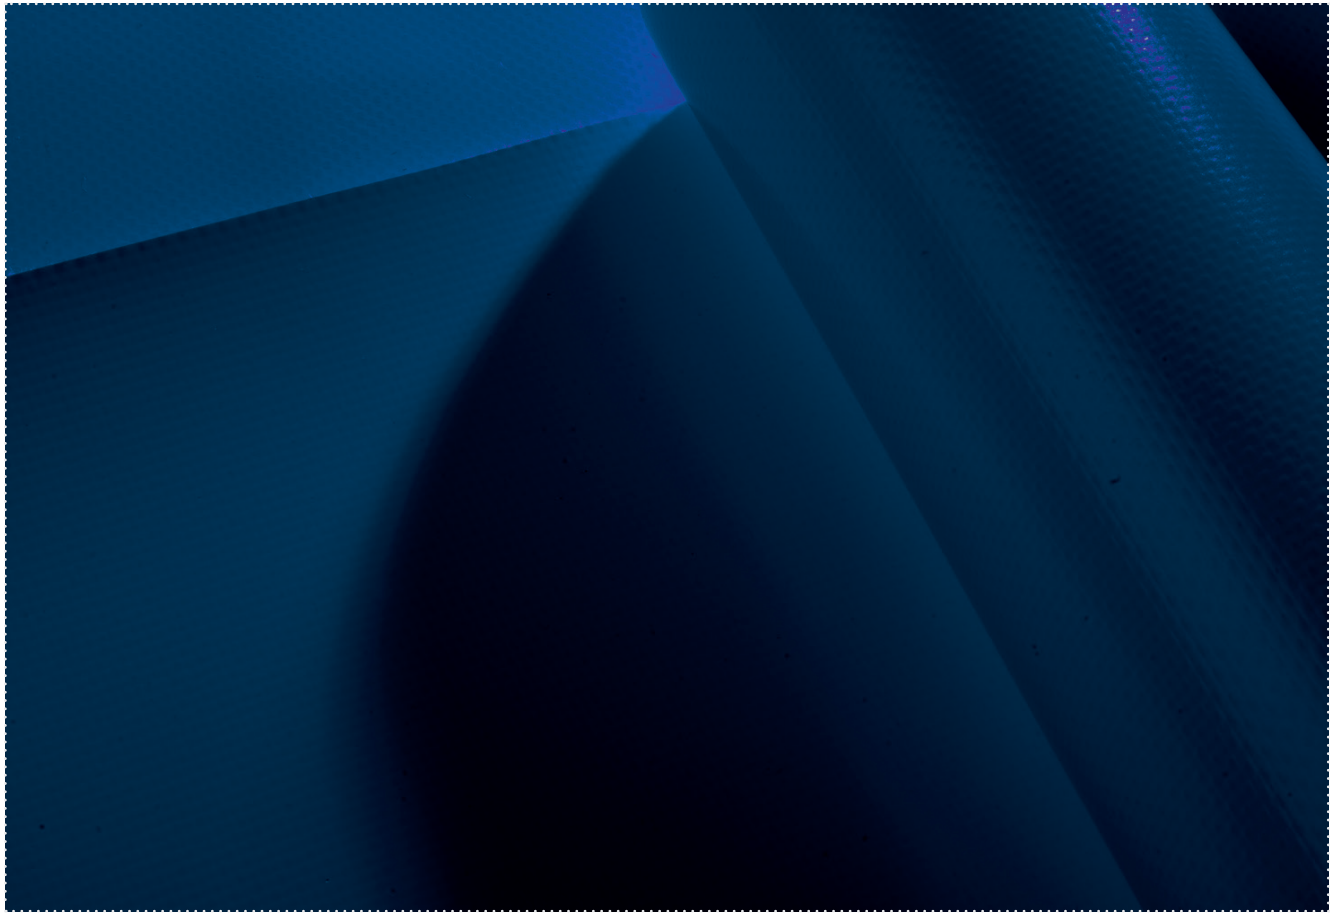

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande // Otros colores bajo pedido // Andere kleuren op aanvraag

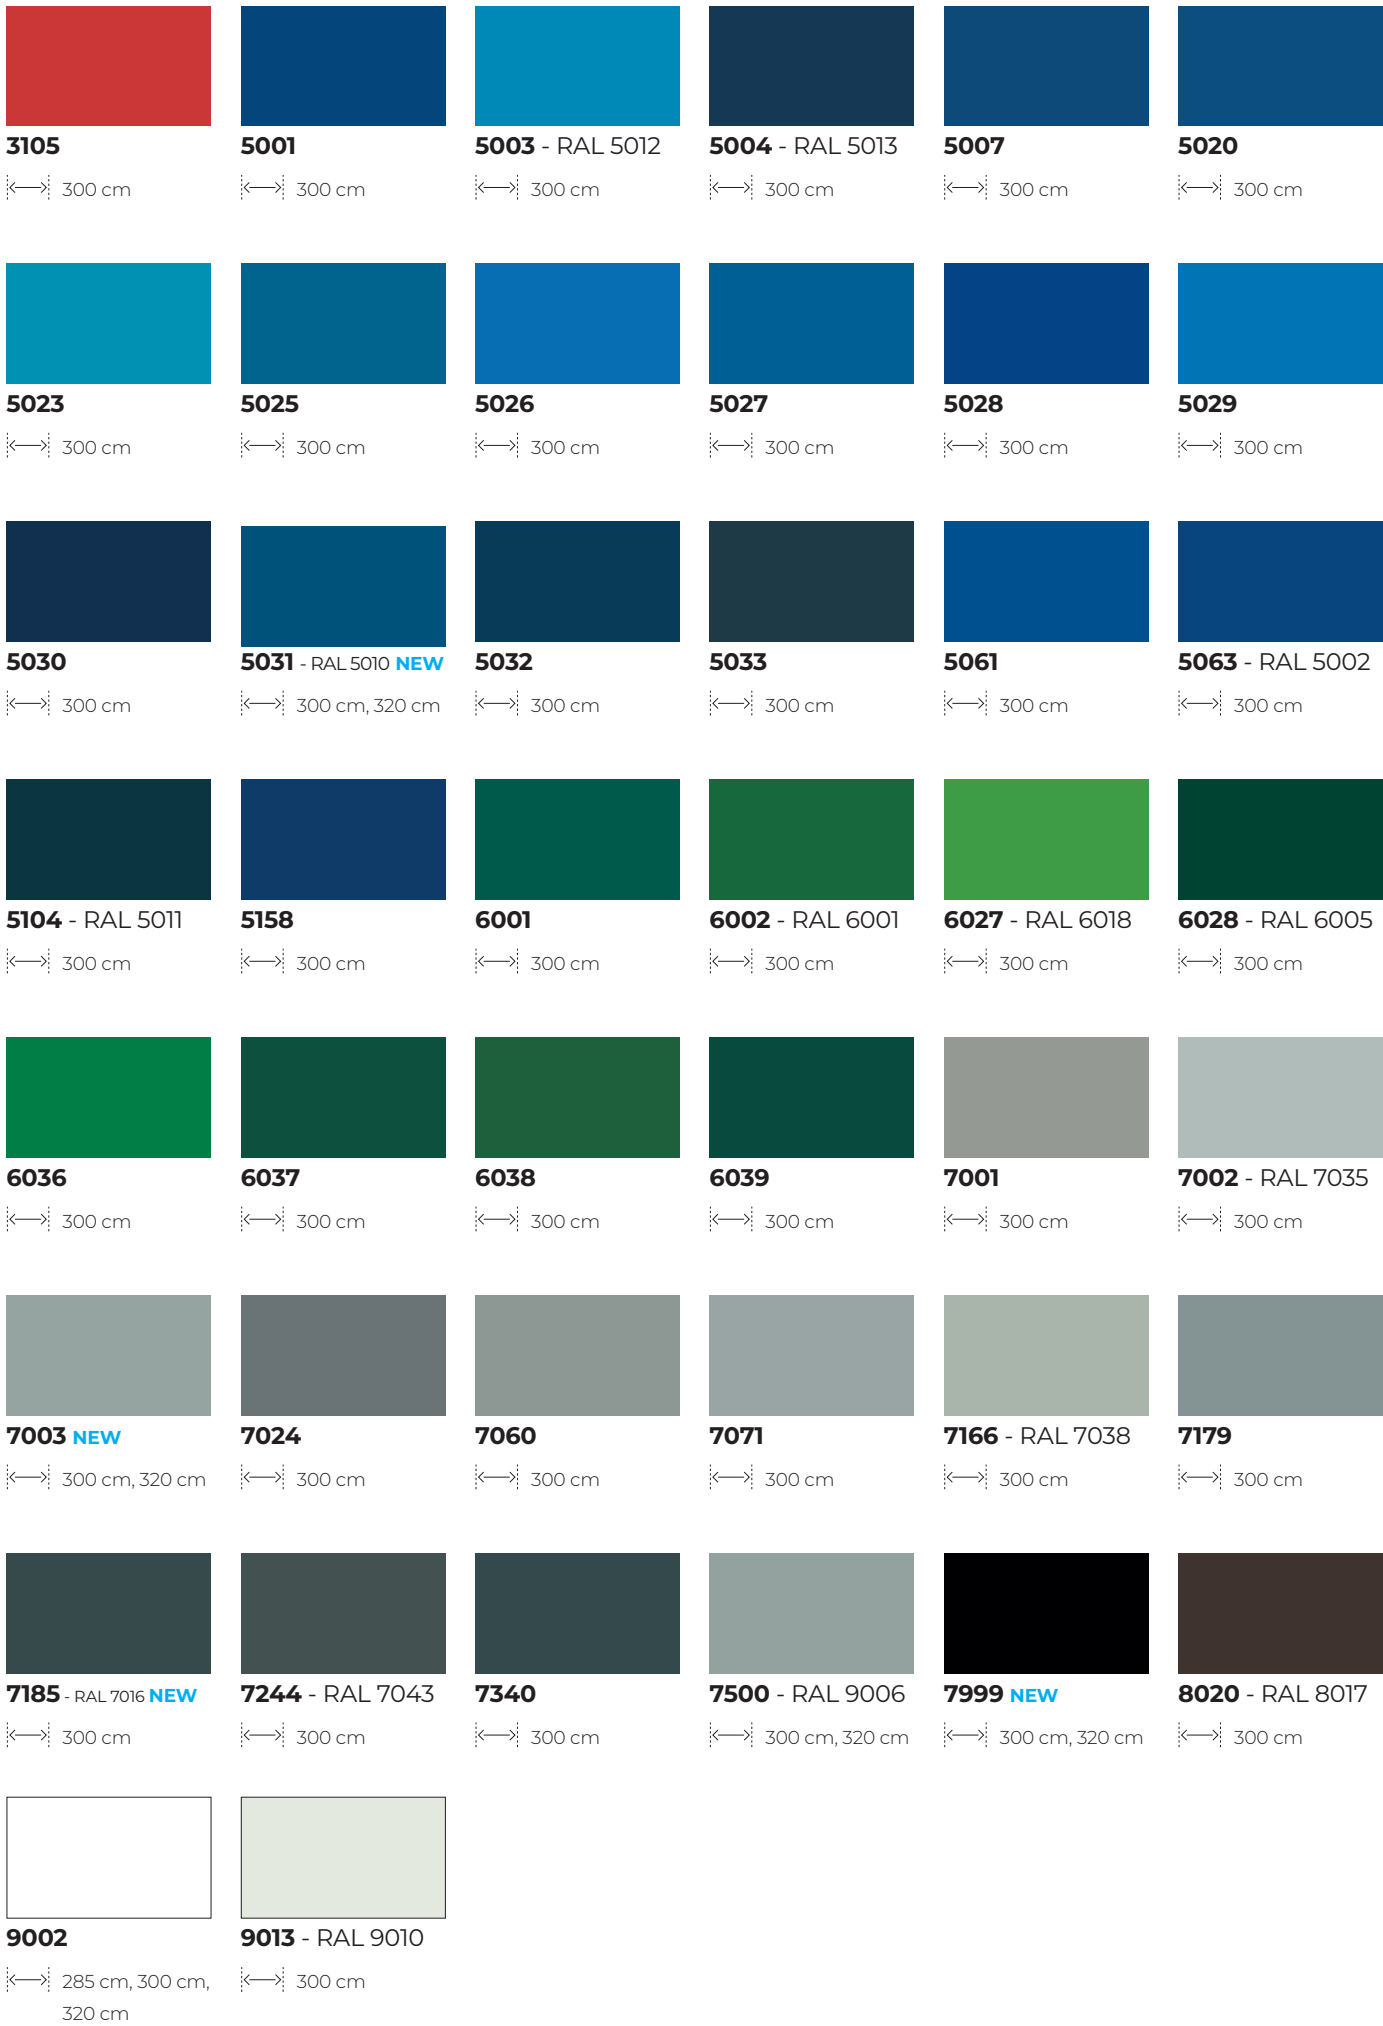

B6134


Flame retardant // Flammhemmend // Ignifuge // Ignifugo // Vlamvertragend



Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande // Otros colores bajo pedido // Andere kleuren op aanvraag


B6701

Anti-static // Antistatisch // Anti-statique // Antiestático // Antistatisch

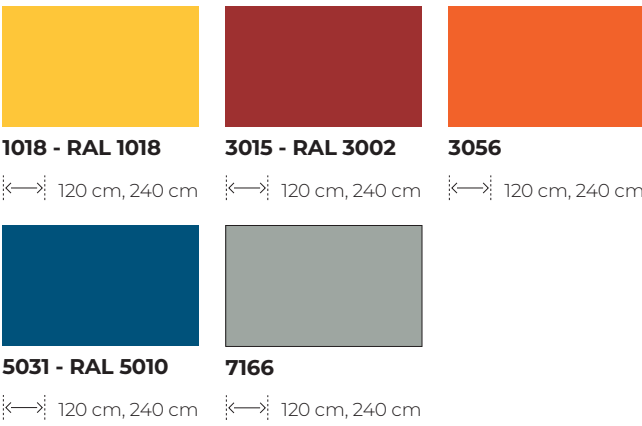

S2100 (Silicone)

Extreme heat resistant (180°C) // Extrem hitzebeständig // Résistance extrême à la chaleur // Resistencia extrema al calor // Extreem hittebestendig

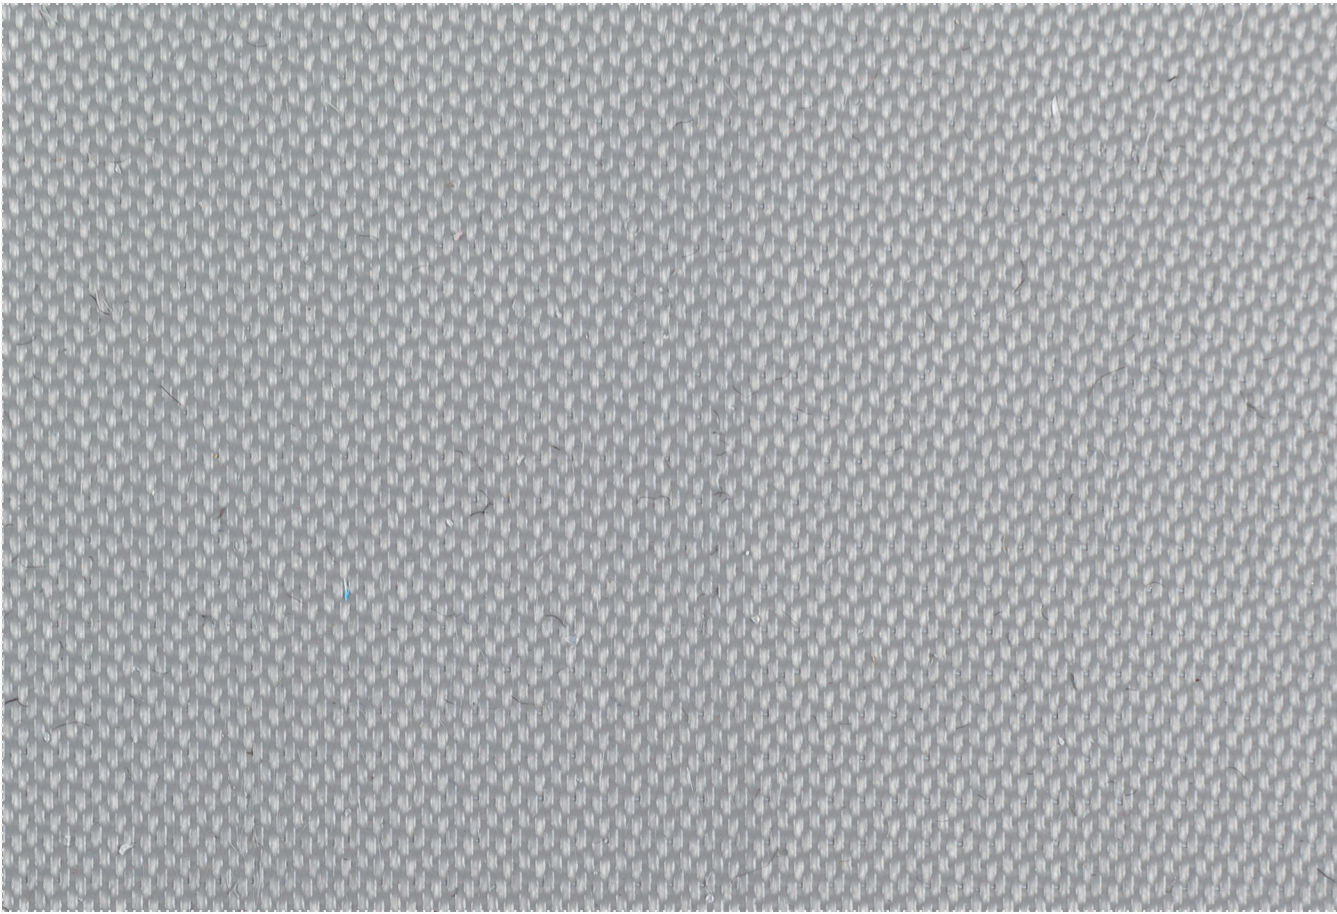

7521 NEW
↔ 300 cm

