

Advantages

Vorteile // Avantages // Ventajas // Voordelen



Outstanding mechanical resistance
Hervorragende mechanische Beständigkeit
Résistance mécanique exceptionnelle
Excelente resistencia mecánica
Uitstekende mechanische weerstand



DLG-certified (B6756)
DLG-zertifiziert
Certification DLG
Certificación DLG
DLG-gecertificeerd



Stable & Machine Protection



biogas, agro
& aquaculture

CAT04002INT261

Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	B6756	Eurocore 55 (W50509001)	Europlus Clear (E6205)
	Machine protection DLG-certified	Multi-use + 80% wind reduction	Translucent scrim
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	1400 g/m²	250 g/m²	750 g/m²
Composition Zusammensetzung // Composition // Composición // Samenstelling	PES + PVC		
Fabric (Warp / Weft) - DIN ISO 2060:1994 Gewebe // Tissu // Tejido // Weefsel	PES, 1100 dtex PES, 1670 dtex	PES, 1100 dtex PES, 1100 dtex	
Lacquering Lackierung // Laquage // Tipo lacado // Lacquering	Top: dull Bottom: semi dull	-	
Breaking Strength (Warp / Weft) - ISO 1421/1:2016 Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	> 6000 N/5cm > 6000 N/5cm	≥ 1600 N/5cm ≥ 1600 N/5cm (NBN EN ISO 1421_2017)	≥ 1200 N/5cm ≥ 2000 N/5cm (NBN EN ISO 1421_2017)
Tear Strength (Warp / Weft) - DIN 53363:2003 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	1200 N 1200 N	≥ 400 N ≥ 400 N	≥ 250 N ≥ 350 N
Adhesion - ISO 2411:2017 Haftung // Adhérence // Adhesión // Hech- ting	125 N/5cm	-	-
Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la tem- pérature // Resistencia térmica // Tempera- tuurbestendigheid	-30/+70 °C		
Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit	7-8	6-8	
Fire Behaviour - ISO 3795:1989 Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	< 100 mm/min	-	-



Registration,
Evaluation,
Authorization
and restriction
of Chemicals



Recyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



Sustainable options available
Nachhaltige Optionen verfügbar
Options durables disponibles
Opciones sostenibles disponibles
Duurzame opties beschikbaar



your guide to coated fabrics

Go to [sicline.com](https://www.sicline.com) for more information.
Fabriekstraat 23 - 8850 Ardoole - Belgium
+32 (0) 51 740 900 - info@sicline.com - [sicline.com](https://www.sicline.com)

  Produced in Belgium & France in ISO 9001:2015 certified plants

All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. All Sicline products comply with the Reach Regulation 1907/2006/CE. Last modified: 3 februari 2026 11:59 a.m..



Stable & Machine Protection



Textile solutions for agriculture



Outstanding
mechanical
resistance



DLG certified
(B6756)

B6756 // Eurocore 55 // Europlus Clear


NEOS

NEOS




B6756

Machine protection DLG-certified // Maschinenschutz:
DLG-zertifiziert // Protection machine : certifié DLG //
Protección de la máquina: Certificación DLG // Machine-
bescherming: DLG-gecertificeerd

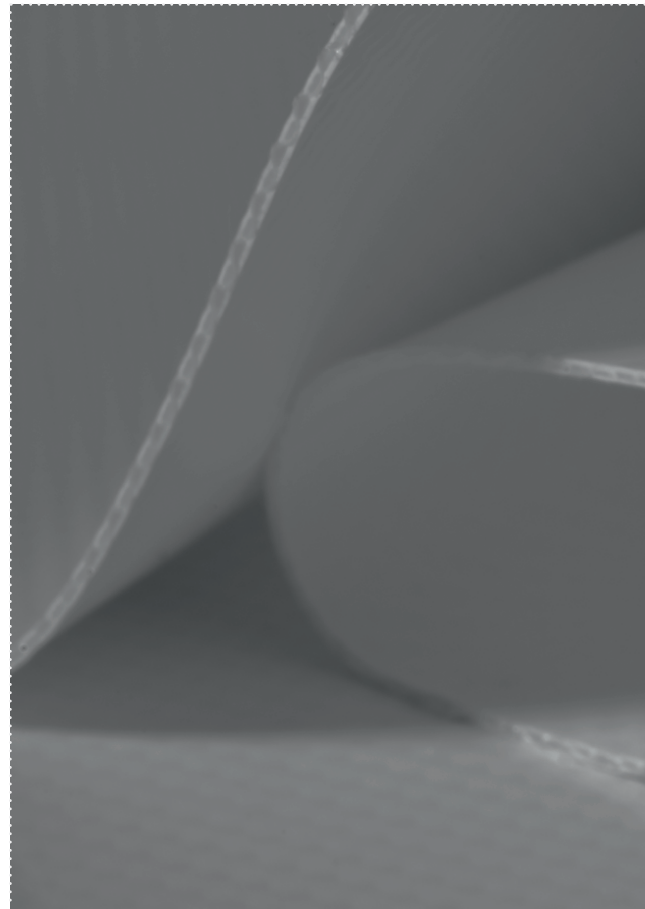

7002 - RAL 7035

245cm




7999

245cm


Europlus Clear (E6205)

Translucent scrim // Transluzentes Gewebe // Scrim
translucide // Malla translúcida de refuerzo // Translucent
versterkingsscrim

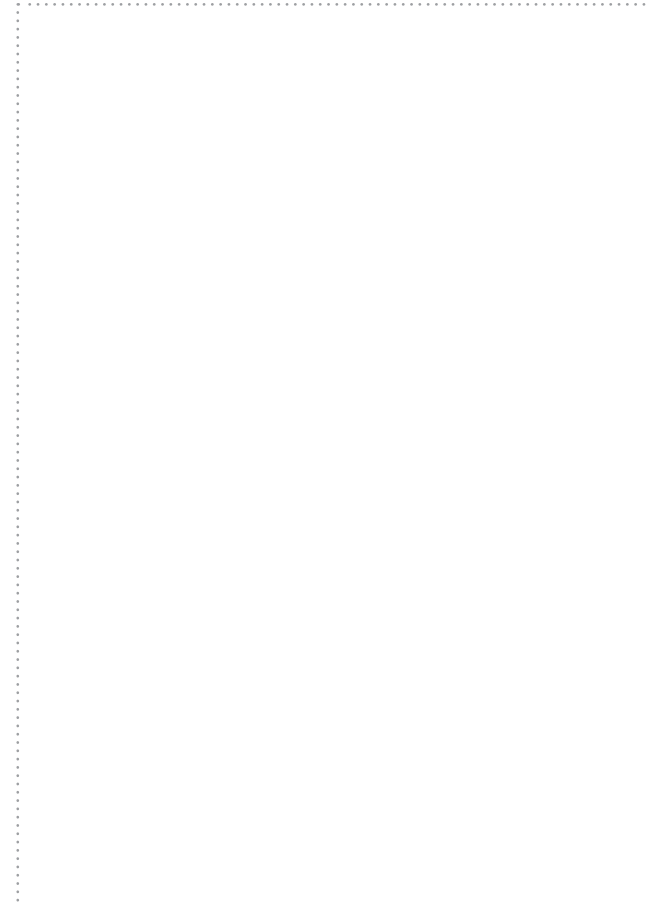

6371

210cm




7999

210cm

Eurocore 55 (W50509001)

Multi-use + 80% wind reduction // Vielseitig einsetzbar + 80% Windreduzierung // Multi-usage + 80% de réduction
du vent // Multiuso + 80% de reducción de viento // Veelzijdig + 80% windreductie

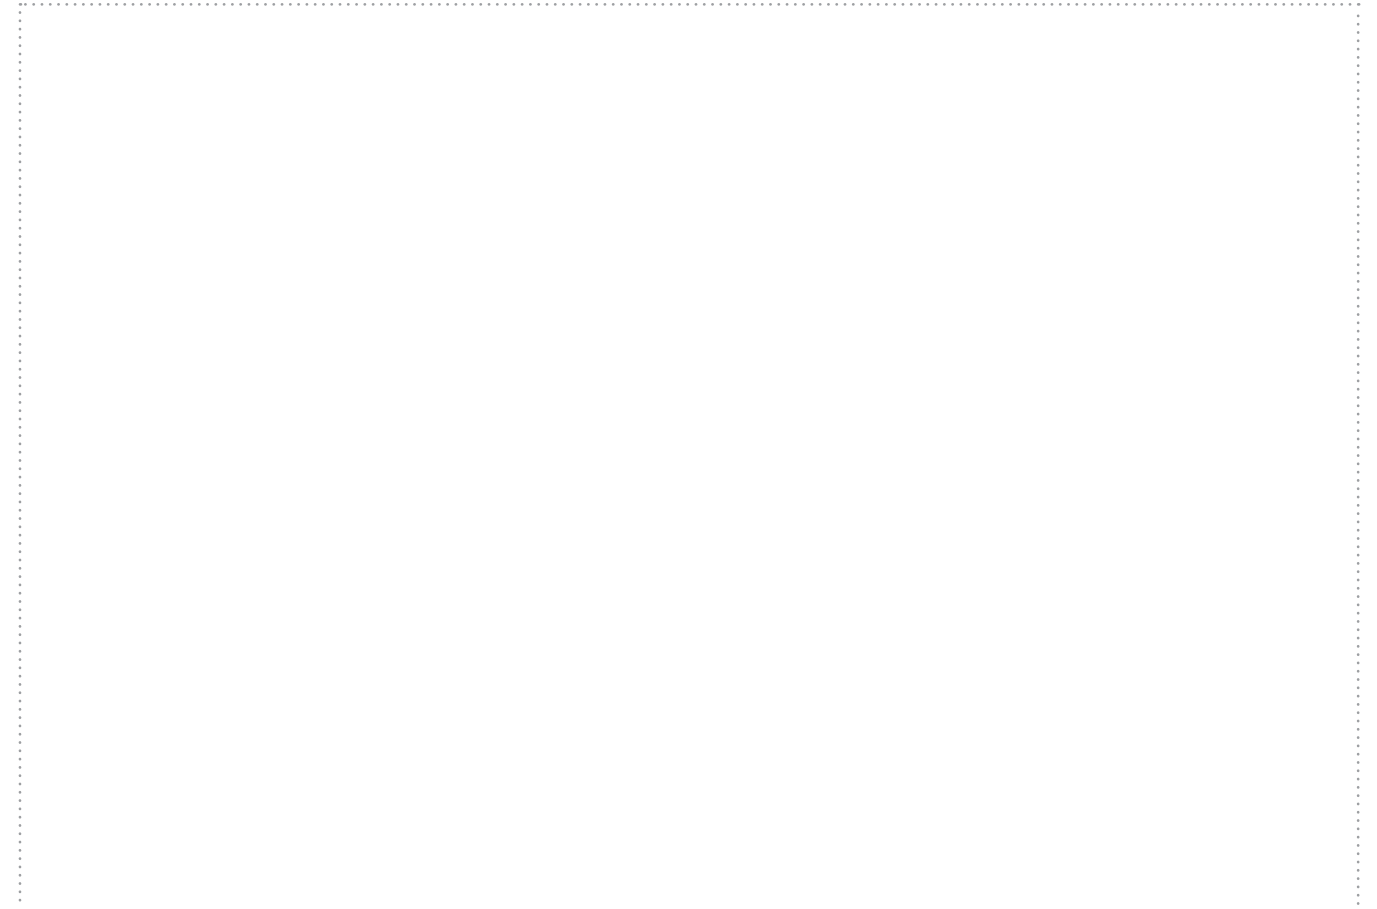

1399

210cm, 320cm



3130

210cm, 320cm



5601

210cm



5603

210cm, 320cm,
370cm



6601

320cm



6602

210cm, 320cm,
370cm



7601

210cm, 320cm,
370cm



7999

210cm, 320cm,
370cm



9917

210cm, 320cm,
370cm

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag

Other colours on request // Andere Farben auf Anfrage // Autres coloris sur demande //
Otros colores bajo pedido // Andere kleuren op aanvraag