

Advantages

Vorteile // Avantages // Ventajas // Voordelen



Wide colour range
Grosse Farbpalette
Large gamme de couleurs
Amplia gama de colores
Groot aanbod aan kleuren

Width up to 360cm
Breite bis 360cm
Laize jusqu'à 360cm
Anchura hasta 360 cm
Breedte tot 360cm

Flame retardant options on request
Flammhemmende Optionen auf Anfrage
Options ignifuges sur demande
Opciones ignífugas a petición
Vlamvertragende opties op aanvraag

Different wind breaking reductions
Verschiedene Windbrechreduzierungen
Différentes réductions de la vitesse du vent
Diferentes reducciones de rotura de viento
Verschillende windbreekreducties

Anti-static options on request

Antistatische Optionen auf Anfrage
Options anti-statiques sur demande
Opciones antiestáticas a petición
Antistatische opties op aanvraag



Scrims



industry & construction

CAT06002|NT261

Technical specifications

Technische Daten // Données techniques // Datos técnicos // Technische specificaties

	Eurocore 55 (W50509001) Multi-use + 80% wind reduction	Eurocore 55 FR (W50509004) Flame-retardant	Europlus Multi FR (W969615H3) 75% wind reduction	Europlus Sports (W903001L3) High-stretch	Europlus Clear (E6205) Translucent scrim
Total Weight - ISO 2286/2:2016 Gesamtgewicht // Poids total // Peso total // Totaal gewicht	250 g/m²	250 g/m²	420 g/m²	375 g/m²	750 g/m²
Composition Zusammensetzung // Composition // Composición // Samenstelling	PES + PVC				
Fabric (Warp / Weft) DIN 53632:2005 Gewebe // Tissu // Tejido // Weefsel	PES, 1100 dtex PES, 1100 dtex				
Breaking Strength (Warp / Weft) (NBN EN ISO 1421:2017) Höchstzugkraft // Résistance rupture // Resistencia a la tracción // Treksterkte	≥ 1600 N/5cm ≥ 1600 N/5cm	1600 N/5cm 1600 N/5cm	≥ 2900 N/5cm ≥ 2800 N/5cm	≥ 2800 N/5cm ≥ 2200 N/5cm	≥ 1200 N/5cm ≥ 2000 N/5cm
Tensile Strength Elongation (Warp / Weft) (NBN EN ISO 1421:2017) Reissdehnung // Allongement sous charge déterminé // Resistencia a la tracción alargamiento de deformación // Breukverlenging	≥ 18 % ≥ 18 %	> 10 % > 15 %	≥ 15 % ≥ 15 %	≥ 25 % ≥ 25 %	≥ 18 % ≥ 18 %
Tear Strength (Warp / Weft) DIN 53632:2005 Weiterreisskraft // Résistance à la déchirure // Resistencia al desgarro // Scheurweerstand	≥ 400 N ≥ 400 N	≥ 400 N ≥ 400 N	-	≥ 700 N ≥ 400 N	≥ 250 N ≥ 350 N
Light Fastness - ISO 105 B02:2014 Lichtechtheid // Tenue à la lumière // Solidez color // Lichtechtheit	6-8				
Temperature resistance - EN 1876/1:1998 Temperaturbeständigkeit // Tenue à la température // Resistencia térmica // Temperatuurbestendigheid	-30/+70°C				
Fire Behaviour Brennverhalten // Reaction au feu // Resistencia al fuego // Brandgedrag	-	(NF P 92 507:2004) M1 (DIN 4102-1:1998) B1	(NF P 92 507:2004) M2 (DIN 4102-1:1998) B1	-	-
Reaction to Fire - EN 13501-1: 2007 + A1:2009 Reaktion auf Feuer // Réaction au feu // Reacción al fuego // Reactie op vuur	-	B-s2,d0	-	-	-



Registration,
Evaluation,
Authorization
and restriction
of Chemicals



Recyclable fabric
Recyclable Textilien
Textiles recyclables
Productos reciclables
Recycleerbaar textiel



Slitting (width) on request
Schneiden (Breite) auf Anfrage
Tronçonnage (largeur) sur demande
Cortar (ancho) bajo pedido
Snijden (breedte) op aanvraag



your guide to coated fabrics

Go to [sicline.com](https://www.sicline.com) for more information.
Fabriekstraat 23 - 8850 Ardooie - Belgium
+32 (0) 51 740 900 - info@sicline.com - [sicline.com](https://www.sicline.com)



Produced in Belgium & France in ISO 9001:2015 certified plants

All our technical characteristics are indicative. Please note that all information given in this document is intended to be useful and informative and is correct to the best of our knowledge at time of print. No liability can be accepted for inaccuracies or omissions. All Sicline products comply with the Reach Regulation 1907/2006/CE. Last modified: 3 februari 2026 12:02 p.m..



Scrims



Polyester woven mesh with
PVC coating



Wide colour
range



Flame retardant
options on
request



Width up to
360cm



Different wind
breaking
reduction


Eurocore 55 // Eurocore 55 FR //
Europlus Multi FR // Europlus Sports //
Europlus Clear

NEOS

NEOS

Eurocore 55 (W50509001)

Multi-use + 80% wind reduction // Vielseitig einsetzbar + 80% Windreduzierung // Multi-usage + 80% de réduction du vent // Multiuso + 80% de reducción de viento // Veelzijdig + 80% windreductie

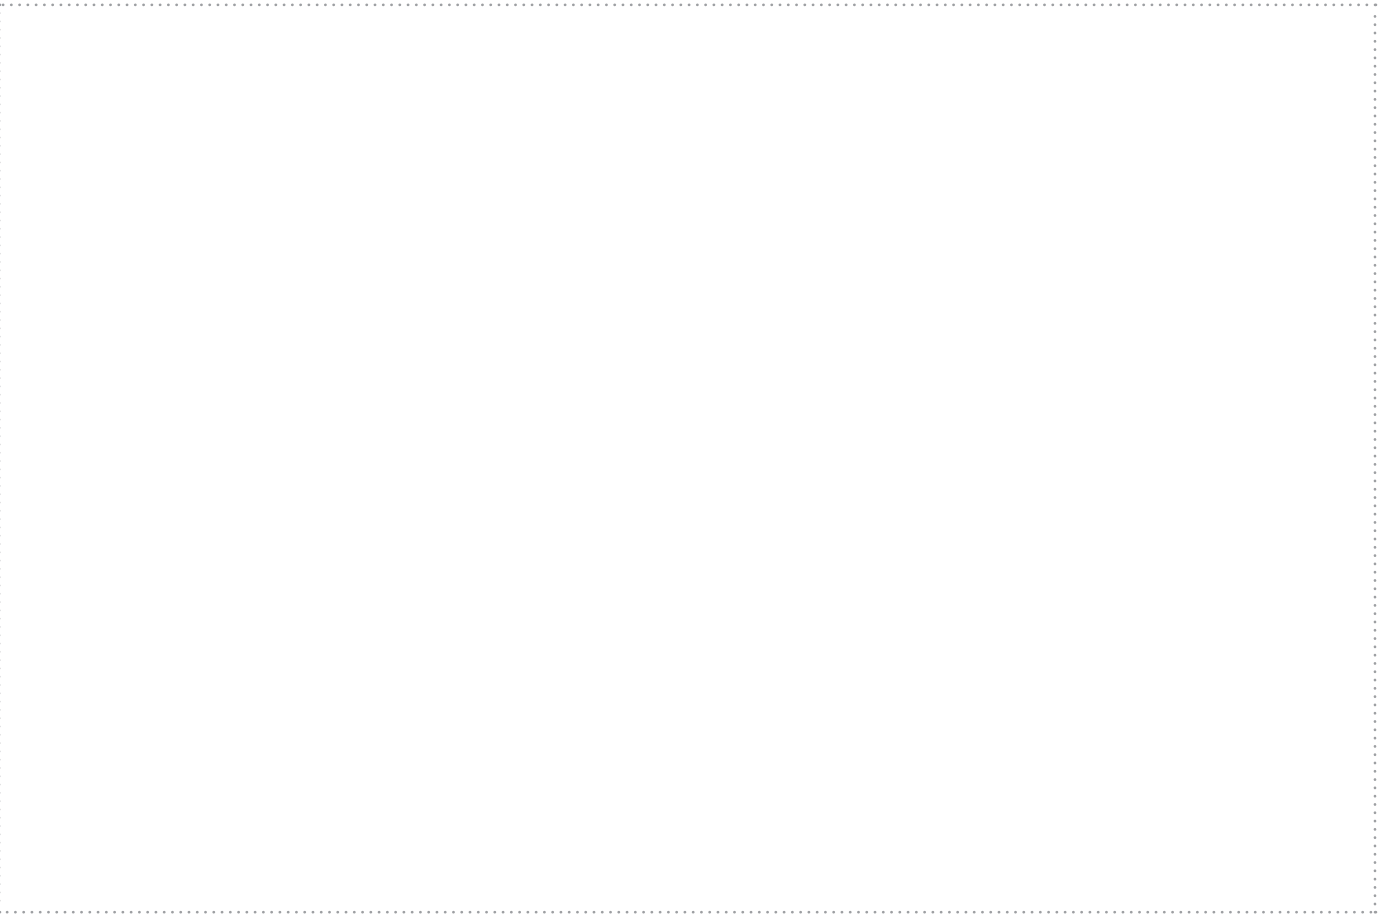

1399



 210cm, 320cm

3130



 210cm, 320cm

5601



 210cm

5603



 210cm, 320cm, 370cm

6601



 320cm

6602




 210cm, 320cm, 370cm

7601



 210cm, 320cm, 370cm

7999



 210cm, 320cm, 370cm

9917




 210cm, 320cm, 370cm

Eurocore 55 FR (W50509004)

Flame-retardant // Flammhemmend // Ignifuge // Retardante de llama // Vlamvertragend



7999



 320 cm

Europlus Multi FR (W969615H3)

75% wind reduction // 75% Windreduzierung // 75% de réduction du vent // 75% de reducción de viento // 75% windreductie




7601



 320 cm

7999



 320 cm

Europlus Sports (W903001L3)

High-stretch // Hoch dehnbar // Hautement extensible // Altamente extensible // Hoog rekbaar




6484



 300cm


7999



 300cm

Europlus Clear (E6205)

Translucent scrim // Transluzentes Gewebe // Scrim translucide // Malla translúcida de refuerzo // Translucent versterkingsscrim

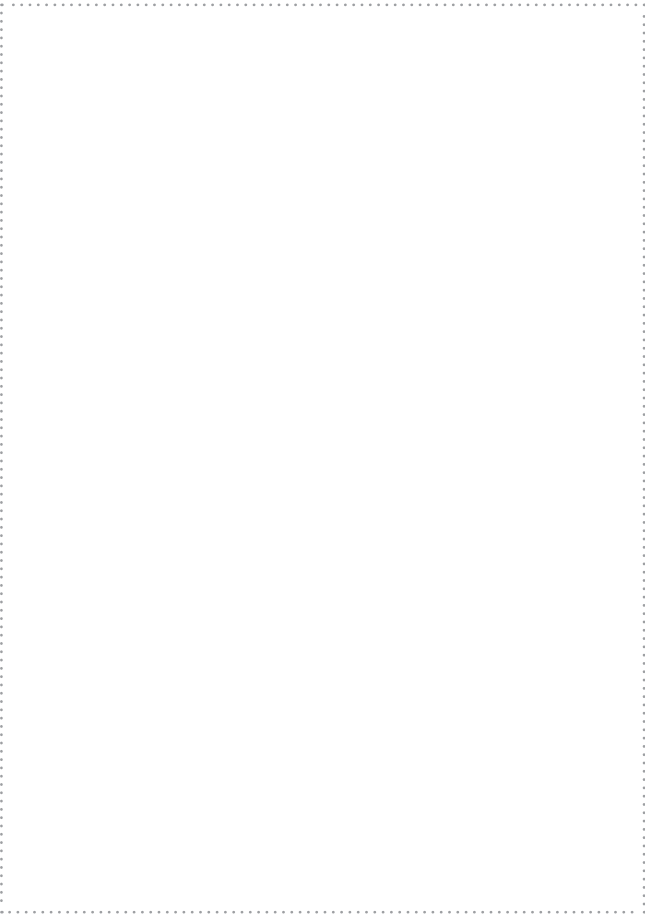


6371



 210cm

7999



 210cm